

Termék adatlap

DULUX F 18 W/830 2G10

OSRAM DULUX F | Flat CFLni, 2 tubes, with 4-pin base for ECG/CCG operation



Termék adatlap

Műszaki adatok

További termékadatok

Ártalmatlanítás WEEE szerint	Yes
------------------------------	-----


Tanúsítványok és szabványok

ZLDV_Energy efficiency class [AGGR]	G
-------------------------------------	---

Környezetvédelmi információk

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	03-02-2023
Declaration No. in SCIP database	In work



Light Distribution

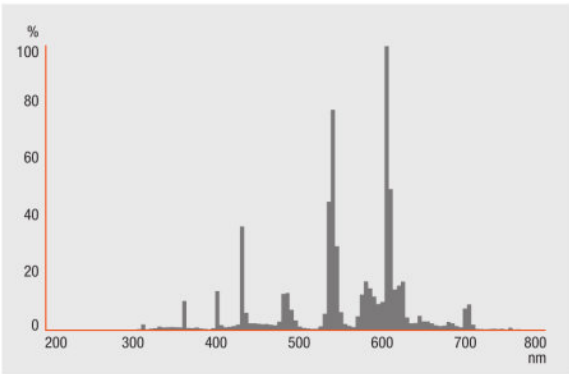

FL_830



Equipment / Accessories

- Suitable for operation on electronic and conventional control gear



SERIES CONNECTION WITH QUICKTRONIC

SINGLE LAMP WITH QUICKTRONIC

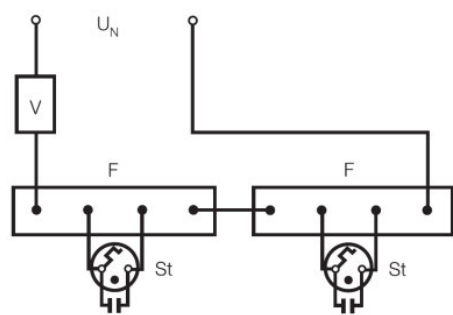

SERIES CONNECTION TO 230V ONLY WITH STARTER ST151

SINGLE LAMP STARTER ST 111 OR ST 171

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

References / Links

For more information on QUICKTRONIC electronic control gear go to

► www.osram.hu/QUICKTRONIC

Lemondás

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany

DULUX F 18 W/830 2G10

OSRAM DULUX F | Flat CFLni, 2 tubes, with 4-pin base for ECG/CCG operation

Product name	Product name ECG	EAN	Névleges teljesítmény + veszteség	Nominal current	Luminous flux at 35 °C	Number of lighting outlets
DULUX F 18 W/830 2G10	QT-ECO 1x18-24/220-240 S	4050300638560	18.00 W	0.13 A	1000 lm	1
	QTi DALI 2x18 DIM	4050300870526	37.00 W	0.16 A	1100 lm	2
	QTi DALI 3x18 DIM	4008321069979	53.60 W	0.24 A	1100 lm	3
	QTi DALI 4x18 DIM	4008321070050	69.30 W	0.31 A	1100 lm	4
	QTP-M 1x26-42	4008321329134	19.00 W	0.09 A	1050 lm	1
	QTP-M 2x26-32	4008321329158	36.00 W	0.16 A	1050 lm	2
	QTP-OPTIMAL 1x18-40	4008321873743	18.00 W	0.08 A	1050 lm	1
	QTP-OPTIMAL 2x18-40	4008321873767	33.00 W	0.16 A	1050 lm	2

Product name	Product name ECG	EAN	EEI – Energy Label (prod. comb.)
DULUX F 18 W/830 2G10	QT-ECO 1x18-24/220-240 S	4050300638560	A2
	QTi DALI 2x18 DIM	4050300870526	
	QTi DALI 3x18 DIM	4008321069979	
	QTi DALI 4x18 DIM	4008321070050	
	QTP-M 1x26-42	4008321329134	
	QTP-M 2x26-32	4008321329158	
	QTP-OPTIMAL 1x18-40	4008321873743	

Termék adatlap

Product name	Product name ECG	EAN	EEI – Energy Label (prod. comb.)
	QTP-OPTIMAL 2x18-40	4008321873767	