

OTi DALI 35/220...240/400 D NFC TW L

OPTOTRONIC Intelligent Tunable White – DALI (non-isolated) | Linear constant current LED driver – Dimmable



A termék jellemzői

- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Supply voltage: 220...240 V

Alkalmazási területek


- Installation in emergency lighting systems according to IEC 61347-2-13, appendix J
- Suitable for installation in emergency lighting systems according to EN 60598-2-22
- Suitable for luminaires of protection class I

Műszaki adatok


Elektromos adatok

Névleges bemeneti feszültség	220...240 V
Hálózati frekvencia [calc.]	0/50/60 Hz
Bemeneti feszültség, AC	198...264 V
Bemeneti feszültség DC	176...276 V
Current set	DALI / NFC / Programmable
Teljes harmonikus torzítás	< 10 %
Teljesítménytényező, λ	0.47C...0.95
Efficiency in full-load	90 % ¹⁾
Készülék vesztesége	3,0 W
Bemelegedési áram	17 A
Megszakítón megengedett előtét db 10 A (B)	19
Megszakítón megengedett előtét db 16 A (B)	28
Előtétek legnagyobb db-száma/megszakító	-
Lökőfeszültség-állóság, (L/N-föld)	2 kV
Lökőfeszültség-állóság, (L-N)	1 kV
Névleges kimeneti feszültség	45...240 V
U-OUT (üzemi feszültség)	< 250 V
Névleges kimeneti áram	75...400 mA
Default output current	75 mA
Kimeneti áram tűrés	±3 %
Kimeneti ripple áram (100 Hz)	< 1 %
Output PSTLM	≤1
Output SVM	≤0.4
Névleges kimeneti teljesítmény	4...38 W
Legnagyobb kimenő teljesítmény	38 W
Galvanikus elválasztás	Non isolated
Veszteségi teljesítmény készenléti	<0.2 W
Galvanikus elválasztás primer/szekunder	-


¹⁾ at 230 V, 50 Hz

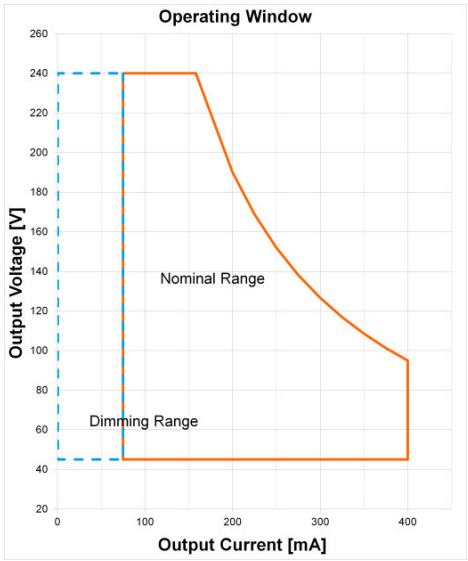


OTI DALI 35220-240400 D NFC TWL Operating Window

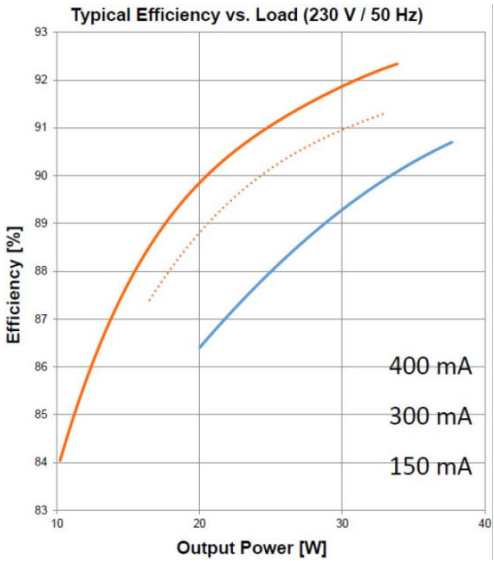

OTI DALI 35220-240400 D NFC TWL Typical Efficiency vs. Load (230 V 50 Hz)

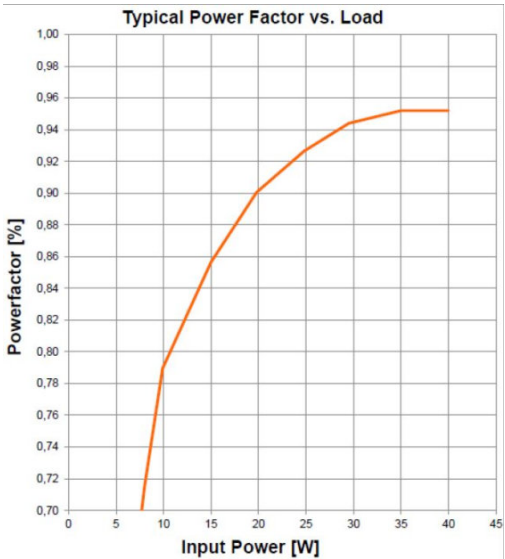


OTI DALI 35220-240400 D NFC TWL Typical Power Factor vs. Load

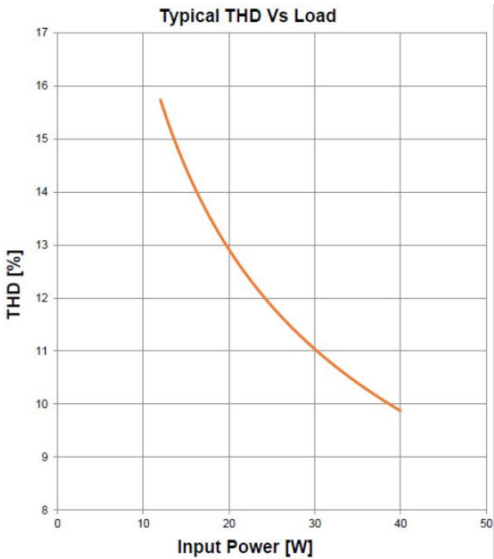

OTI DALI 35220-240400 D NFC TWL Typical THD Vs Load

Méretetek és súly

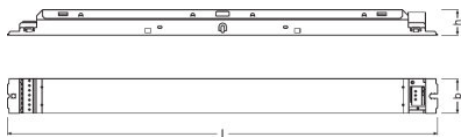

Szerelési furattávolság, hosszúság	350,0 mm
Termék súlya	235.00 g
Vezeték keresztmetszet, bemeneti oldal	0,5...1,5 mm ²
Vezeték keresztmetszet, kimeneti oldal	0,5...1,5 mm ²
Vezeték-előkészítési hossz, bemenet	8,0...9,0 mm
Vezeték-előkészítési hossz, kimenet	8,0...9,0 mm
Hosszúság	360.0 mm
Szélesség	30.0 mm
Magasság	21.0 mm

Szín és anyag

Ház anyaga	Metal
------------	-------

Hőmérséklet és működési feltételek

Környezeti hőmérséklet tartomány	-25...+50 °C
Max. hőmérséklet a tc mérőponton	75 °C
Max. házhőmérséklet hibaállapotban	110 °C
Hőmérséklet-tartomány tároláskor	-40...+85 °C
Megengedett légnedvesség üzem közben	5...85 % ¹⁾

¹⁾ Maximum 56 nap/év 85 %-on

Élettartam

Elektronikus előtét élettartam	50000 / 100000 h ¹⁾
--------------------------------	--------------------------------

¹⁾ Maximum T_c = 75 °C / 10% meghibásodási arány / At T_c = 65 °C / 10% failure rate

További termékadatokat

Tokozott	Nem
----------	-----

Képességek

Programming interface	DALI, NFC
Dimmelhető	Yes
Dimmelő interfész	DALI-2 / Touch DIM / Touch DIM Sensor
Dimmelési tartomány	1...100 %
Dimmelési módszer	Full analogue dimming / AM/PWM selectable
Állandó fényáram funkció	Programozható
Túlmelegedés védelem	Automatic reversible
Túltérhelés védelem	Automatic reversible
Zárlatvédett	Automatic reversible
Nem terhelés-védett	Yes
Intended for no-load operation	Nem
Max. vezeték hossz lámpa/LED modul	2,0 m ¹⁾
Alkalmasság érintésvédelmi osztályhoz	I
Tartalékvilágításhoz alkalmas	Igen
Csatlakozás típusa, bemeneti oldal	Nyomógombos kapocs
Csatlakozás típusa, kimeneti oldal	Nyomógombos kapocs
Control interface	DALI
Number of channels	2
DALI-2 Energy Data	Nem
DALI-2 Diagnostic Data	Nem

¹⁾ Output wires must be routed as close as possible to each other

Programming

Programming device	DALI magic / NFC Scanner
Tuner4TRONIC	Igen
Tuner4TRONIC Field App	Nem
Box programming	Yes

Programmable features

Operating Current	Igen
Lamp Operating Time	Igen
Driver Guard	Igen
DALI Settings	Igen
Emergency Mode	Igen
DALI-2 Luminaire Data	Nem
Soft Switch Off	Igen
Dim to Dark	Igen

Termék adatlap

TouchDIM + Sensor	Igen
Corridor Functionality	Igen
Tunable White CCT	Igen
Tunable White High precision	Igen

Tanúsítványok és szabványok

Jóváhagyási jelek	CE / EL / VDE-ENEC / EAC / CCC / RCM / BIS
Szabványok	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547
Védettség típusa	IP20

Logisztikai adatok

Commodity code	850440829000
----------------	--------------

Környezetvédelmi információk

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	29-03-2024
Primary Article Identifier	4052899990302 4050732460524
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	d5ddc869-40bf-4840-8ca3-4fa129618d04 5d018f90-f20f-4306-87aa-04a991f4a89a

Adatlap szöveg

- Electrical connections between the two output channels are not allowed.

Download Data

File	
	User instruction OPTOTRONIC LED Power Supply
	User instruction OPTOTRONIC LED Power Supply
	Certificates OT EMC 40050085 200220
	Certificates OT ENEC 40038085 010322

Termék adatlap

	Certificates OT EMC 40044675 031022
	Declarations of conformity OTI DALI D NFC TW L UK DoC 4287948 110522
	Declarations of conformity OTI DALI D NFC TW L CE 3633314 110522
	Declarations of conformity EATON(CEAG) Conformity declaration AM28017 OTi DALI35 220-240 400 D NFC TW L
	Declarations of conformity INOTEC Conformity declaration AM28017 OTi DALI35 220-240 400 D NFC TW L
	CAD data OTI DALI D NFC TWL IGS 050220
	CAD data OTI DALI D NFC TWL STEP 050220
	CAD Data 2-dim OTI DALI D NFC TWL CAD2PDF 050220
	CAD data 3-dim OTI DALI D NFC TWL CAD3PDF 050220

Ecodesign regulation information:

Intended for use with LED modules.

The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logisztikai adatok

Termékkód	Termékmegnevezés	Csomagolás (darab/egység)	Méretek (hosszúság x szélesség x magasság)	Térfogat	Bruttó súly
4052899990302	OTi DALI 35/220...240/400 D NFC TW L	Karton 20	385 mm x 160 mm x 100 mm	6.16 dm ³	4871.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Adatvédelem

Termék adatlap

This OSRAM driver can be configured using the Tuner4TRONIC software. This requires registering on www.mynosram.com and downloading the Tuner4TRONIC software from the Internet. The Tuner4TRONIC software enables users to access and view the operational data of a luminaire or driver via the corresponding programming interfaces. A password key (Config Lock) must be set up in the driver via the Tuner4TRONIC software in order to control which users can access and view operational data. Follow the instructions for password setup. To grant an external person or company rights to access or view operational data, you can assign password keys. In this case, however, you are responsible for ensuring that the third party concerned takes notice of the information described here. However, OSRAM can read out operating data from devices for maintenance and service purposes even when a password key has been assigned. In individual cases, OSRAM will also use its access rights in order to optimize or improve driver hardware and driver functions. In accordance with data privacy principles, any user of operating data (luminaire manufacturers, third parties with access rights) must ensure that personal data (e.g. name, address, location IDs) are only merged with the prior written consent of the person (end user) concerned. The respective user of the operating data is responsible for providing evidence of consent.

Lemondás

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.