

HTI 2500 W/SE XS

HTI | Fémhalogén lámpák, egy végén fejelt



A termék előnyei

- High luminance
- High luminous efficacy and efficiency



Műszaki adatok


Elektromos adatok

Névleges teljesítmény	250000 W
Névleges feszültség	105 V
Lámpa feszültség	115 V
Névleges áram	238 A
Lamp current	238 A

Fotometriai adatok

Névleges fényáram	240000 lm
Fénysűrűség	30000 cd/cm²
Színhőmérséklet	6000 K
Színvisszaadási index	90
Luminous efficacy	95 lm/W

Méretetek és súly

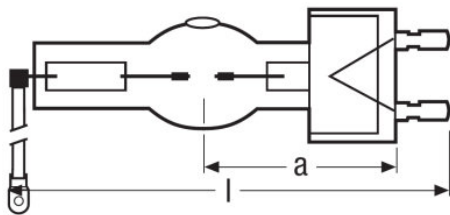

Átmérő	3300 mm
Hosszúság	1800 mm
Fénypontmagasság (LCL)	85,0 mm

Élettartam

Élettartam	600 h
------------	-------

További termékadatokat

Lámpafej (szabványos megjelölés)	G22 ¹⁾
----------------------------------	-------------------

Termék adatlap

Product remark	Special GY22 base. The ignition voltage may be applied only to the thin pin/XS = eXtreme Seal (maximum permissible foil temperature 450 °C)/Important: The contact pins of the base are short-circuited; the electrode farthest from the base is connected via cable
----------------	--

1) Important: The contact pins of the base are short-circuited; the electrode farthest from the base is connected via cable

Képességek

Égetési helyzet	Other
-----------------	-------

Környezetvédelmi információk

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	05-03-2024
Primary Article Identifier	4050300371146
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	3978605c-1e11-462a-9ec2-94ccc12ef473


Country specific information

Termékkód	METEL kód	SEG-No.	STK-Number	UK Org
4050300371146	OSRHTI2500SE	-	-	-

Termék adatlap

Biztonsági tanács

Because of their high luminance, UV radiation and high internal pressure during operation, HTI lamps may only be operated in enclosed lamp casings specially constructed for the purpose. Appropriate filters must ensure that UV radiation is reduced to an acceptable level. Mercury is released if the lamp breaks. Special safety precautions must be taken. Information on safety and handling is available on request or can be found in the leaflet included with the lamp or in the operating instructions.

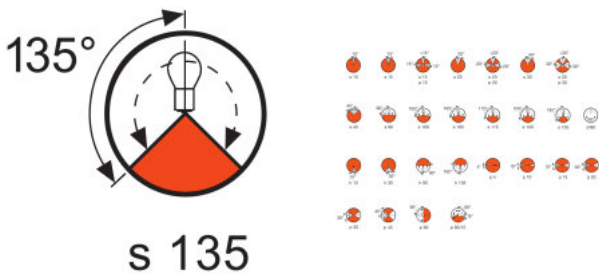

Logisztikai adatok

Termékkód	Termékmegnevezés	Csomagolás (darab/egység)	Méretek (hosszúság x szélesség x magasság)	Térfogat	Bruttó súly
4050300371146	HTI 2500 W/SE XS	Karton 1	305 mm x 82 mm x 115 mm	2.88 dm ³	287.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Lemondás

A változtatás jogát fenntartjuk. Hibák és mulasztások kizárva. Mindig győződjön meg arról, hogy a legújabb kiadást használja.