

DALI magic | USB to DALI programming interface



- Intuitive configuration of up to 64 DALI electronic control gears
- Offline / Online configuration of DALI installations
- "DALI-Spy"-functionality for recording DALI line data flow




Műszaki adatok

Elektromos adatok

Névleges feszültség	100...240 V
Hálózati frekvencia [calc.]	50...60 Hz
System wattage	7.00 W

Méreték és súly

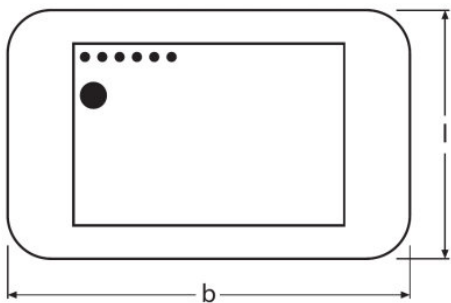

Termék súlya	370.00 g
Hosszúság	120.0 mm
Szélesség	76.0 mm
Magasság	28.0 mm

Szín és anyag

Termék színe	White
--------------	-------

Tanúsítványok és szabványok

Védettség típusa	IP20
------------------	------

Logisztikai adatok

Commodity code	85176200000
----------------	-------------

Környezetvédelmi információk

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	29-03-2024
Primary Article Identifier	4052899039551
Declaration No. in SCIP database	In work

Termék adatlap

Adatlap szöveg

- In order to achieve good radio interference suppression:1. Keep the cable between ECG and lamp as short as possible.2. The single lamp wires must be routed as close as possible to each other, whereas the lines of the different lamp ends must be routed separately.

Download Data

File	
	Declarations of conformity DALI MAGIC CE 4188906 02 160823
	CAD data 3-dim 328821_DALI MAGIC

Logisztikai adatok

Termékkód	Termékmegnevezés	Csomagolás (darab/egység)	Méretek (hosszúság x szélesség x magasság)	Térfogat	Bruttó súly
4052899039551	DALI magic	Karton 1	150 mm x 100 mm x 135 mm	2.03 dm ³	446.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

Tuner4TRONIC software available at
▶ www.osram.com/t4t

Lemondás

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.