

Termék adatlap

PP LEDSPOT 111 1150 W/930 G53

PARATHOM PRO LEDspot 111 | LED reflector lamps AR111 with retrofit pin base



- Shops and exhibition rooms Domestic applications
Commercial applications Accent lighting Outdoor use in
outdoor luminaires only (minimum IP65)

- Quick, simple and safe replacement without rewiring Design, dimensions, luminous flux comparable to an incandescent or halogen lamp Low maintenance costs thanks to long lifetime No UV and near-IR radiation in the light beam Stepless dimming Very high dimmer compatibility, see also "www.ledvance.com/dim" Compatible with many common conventional and electronic control gears (see also "compatibility list") Instant 100 % light, no warm-up time
- Caratteristiche prodotto Alternativa LED alle lampade alogene a bassissima tensione Elevata consistenza cromatica: ≤ 4 SDCM Dimmerabile Attacco: G53 Eccellente resa cromatica (Ra: 97) Durata: fino a 40.000 ore Vantaggi prodotto Sostituzione rapida, semplice e sicura senza dover ricablare Forma, dimensioni, flusso luminoso simili a quelli delle lampade alogene o a incandescenza Costi di manutenzione ridotti grazie alla lunga durata Assenza di emissioni UV e IR nel fascio di luce Dimmer continuo Elevata compatibilità con i dimmer, vedi "www.ledvance.com/dim" Compatibile con molti alimentatori convenzionali ed elettronici comuni (vedere anche "elenco di compatibilità") Luce istantanea al 100%, senza ritardi nel raggiungimento del regime luminoso Aree applicative Negozi e sale da esposizione Applicazioni domestiche Applicazioni commerciali Illuminazione d'accento Solo uso per esterni in apparecchi di illuminazione dedicati (minimo IP65) Referenze/links Per la conformità sulla dimmerabilità consulta "www.ledvance.it/dim" Per la garanzia consulta "www.ledvance.it/garanzia" Per maggiori informazioni consulta "www.ledvance.it/lampadeled" Per maggiori informazioni consulta "www.ledvance.com/low-voltage-ledlamps"



Műszaki adatok

Elektromos adatok

ZLDV_Claimed equiv. conventional lamp power [AGGR]	75 W
ZLDV_Operating frequency [AGGR]	50/60 Hz
ZLDV_Nominal current [AGGR]	1 A A


Fotometriai adatok

ZLDV_Luminous intensity [AGGR]	1600 cd
ZLDV_Light color (designation) [AGGR]	Warm White
ZLDV_Nominal useful luminous flux 90° [AGGR]	800 lm
ZLDV_Rated peak intensity [AGGR]	1600 cd
ZLDV_Luminous flux [AGGR]	800 lm

Fénytechnikai adatok

ZLDV_Beam angle [AGGR]	40 °
ZLDV_Rated beam angle (half peak value) [AGGR]	40.00 °

Méretetek és súly

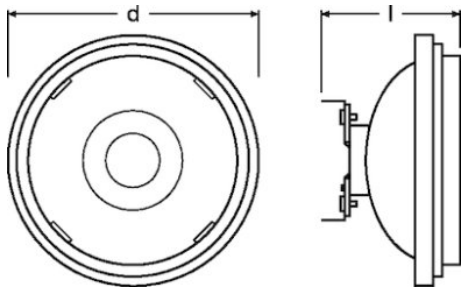

ZLDV_Overall length [AGGR]	55.00 mm
ZLDV_Product weight [AGGR]	135.00 g
ZLDV_Maximum diameter [AGGR]	111 mm

Hőmérséklet és működési feltételek

ZLDV_Ambient temperature range [AGGR]	-20...+40 °C
---------------------------------------	--------------

Élettartam

ZLDV_Lumen maintenance at end of service life [AGGR]	0.7
--	-----

További termékadatok

ZLDV_Mercury content [AGGR]	0.0 mg
ZLDV_Mercury-free [AGGR]	Yes
Ártalmatlanítás WEEE szerint	Yes
Utód EAN	4058075608535
ZLDV_Product remark [AGGR]	All technical parameters apply to the entire lamp Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value
Utód EAN	4058075105072, 4058075448865

Tanúsítványok és szabványok

ZLDV_Energy efficiency class [AGGR]	G
ZLDV_Energy consumption [AGGR]	12.00 kWh/1000h

Környezetvédelmi információk

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	18-04-2022
Primary Article Identifier	4058075448865 4058075608535
Declaration No. in SCIP database	In work

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logisztikai adatok

Termékkód	Termékmegnevezés	Csomagolás (darab/egység)	Méretek (hosszúság x szélesség x magasság)	Térfogat	Bruttó súly
4058075608535	PP LEDSPOT 111 1150 W/930 G53	Karton 6 Pieces Folding Box	238 mm x 208 mm x 123 mm	6.09 dm ³	1125.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Termék adatlap

References / Links

For dimming conformity see

- ▶ www.osram.hu/DIM

For Guarantee see <https://>

- ▶ www.inventronics-light.com/multilevel-guarantees

For further products and actual information concerning LED lamps see

- ▶ www.osram.hu/led-lampak

Further information see

- ▶ www.osram.com/low-voltage-ledlamps

Lemondás

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany