

DALIECO CONTROL

DALI ECO Control | Control units for light management systems



A termék jellemzői

- 2 channel light control with DALI interface
- Daylight-dependent regulation and presence-dependent control of light
- 100 hours burn-in function for fluorescent lamps
- Operation via standard pushbutton or IR remote control
- Outputs with adjustable offset
- Outputs with electronic reversible overtemperature, short-circuit, overload protection
- Connection of up to 4 DALIeco LS/PD LI or 6 DALI LS/PD LI sensors
- Connection of up to 4 light and presence sensors via 4p4c plug system
- Individual adjustment of functional parameters via IR remote control
- Halogen free polycarbonate plastic housing
- Sensor connection via polarity reversal protected 4p4c socket (RJ10)

A termék előnyei

- VDE/VDE EMC certified system
- Simplified startup thanks to predefined operation modes
- Automatic and manual setting of regulation set point

Alkalmazási területek


- Offices
- Classrooms
- Training rooms
- Corridors
- Ceiling or independent installation via ECO CI KIT possible

Műszaki adatok

Elektromos adatok

Névleges feszültség	230 V
Hálózati frekvencia [calc.]	50...60 Hz
System wattage	400 W

Méretetek és súly

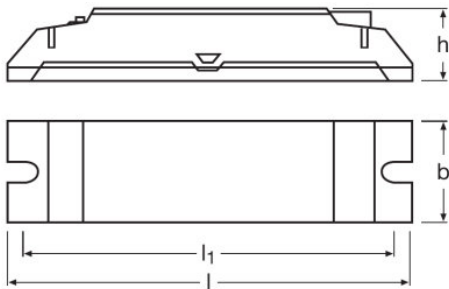

Hosszúság	1180 mm
Szélesség	300 mm
Magasság	210 mm
Termék súlya	4850 g
Szerelési furattávolság, hosszúság	110,0 mm

Hőmérséklet és működési feltételek

Környezeti hőmérséklet tartomány	-20...+50 °C
----------------------------------	--------------

Képességek

Dimmelhető	No
Dimmelő interfész	DALI
Vezérlő kimenetek száma	2
Installáció típusa	Luminaire integration

Tanúsítványok és szabványok

Védettség típusa	IP20
Érintésvédelmi osztály	II

Logisztikai adatok

Commodity code	85371098990
----------------	-------------

Környezetvédelmi információk

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	25-08-2023
Primary Article Identifier	4008321988645
Candidate List Substance 1	Lead titanium zirconium oxide
CAS No. of substance 1	12626-81-2
Candidate List Substance 2	Lead
CAS No. of substance 2	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	6a1e672d-4fa8-4e08-a3e2-9c6caf6ae2b7

Equipment / Accessories

- Suitable for up to 32 electronic control gears

Download Data

File	
	User instruction 507081_Operating instructions DALIeco control_WEU
	User instruction 507083_Operating instructions DALIeco control_EEU
	Product Datasheet 341826_DALIeco Control datasheet (GB)
	Brochures DALIeco: Multi-functional light management system (EN)
	Certificates DALI Zigbee DALI VDE 40047700 080422
	Certificates DALIeco VDE EMC 40037161 2020 04
	Declarations of conformity DALIECO SENSOR CE 2874588 12 160823
	CAD data 3-dim 341824_CAD Data DALIeco
	CAD data 3-dim 341825_CAD Data DALIeco

Termék adatlap

Logisztikai adatok

Termékkód	Termékmegnevezés	Csomagolás (darab/egység)	Méretek (hosszúság x szélesség x magasság)	Térfogat	Bruttó súly
4008321988645	DALIECO CONTROL	Karton 25	240 mm x 238 mm x 189 mm	10.80 dm ³	3019.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Opcionális tartozékok

Termékmegnevezés	Tartozékok neve	Tartozékok kódja
DALIECO CONTROL	ECO CI KIT	▶ 4008321392091

Lemondás

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.