

LF3400TW-G5 -927.957-03 L1

LINEARlight FLEX Tunable White IP00 | Linear LED modules for flexible and individualized lighting solutions



A termék jellemzői

- 24 V LED strips flexible and cuttable
- Up to 60,000 h L90/B10 with SDT technology, tested acc. to IEC 62717 on real LED strips
- Adjustable color temp. via Tunable White: 2200...3500 K, 2500...4000 K, 2700...5700 K CRI90
- Adjustable color temp. via Tunable White: 2200...3500 K, 2500...3500 K, 2700...6500 K CRI80
- CRI80, CRI90 options available
- Stable light flux over length: active constant current regulators (ICs), PWM safe
- Embedded automatic quick protection against accidental miswiring up to 25 V
- Fully PWM dimmable from zero up to 2.5 kHz, audible noise free, suitable for quite places
- Designed, engineered and manufactured and tested in Italy (ISO9001, ISO 17025, ACCREDIA, VDE)

A termék előnyei

- Color uniformity better than 3 SDCM on the entire LED strip and between strips
- LED lifetime acc.to IES LM-80 and IES TM-21 standards, and also internal OSRAM LAB tests
- Excellent robustness: single reel manufacturing technology (no solder joints on strip)
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back
- Extraordinary design and high quality materials
- Pre-soldered wires

Alkalmazási területek

- Cove lighting
- Shop lighting
- Offices



Termék adatlap

Műszaki adatok


Elektromos adatok

Névleges feszültség	240 V
Áram típusa	DC
Névleges teljesítmény / m	30.2 W
Névleges feszültség	9070 W
Bemeneti feszültségtartomány	23...25 V
Accidental reverse input voltage protection up to	25 V

Fotometriai adatok

Fényszín LED	Dynamic White
Color temperature	2700...5700 K
Színvisszaadási index	90
Fényáram / m	3400 lm
Luminous efficacy	113 lm/W
Színegyeztetés szórása	≤3 sdc
Fényszín (megnevezés)	2700...5700 K
Névleges színhőmérséklet	3800 K

Méretetek és súly

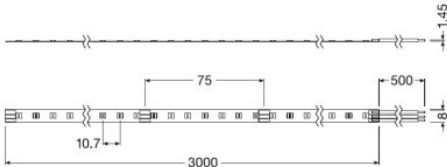

Hosszúság	30000 mm
Vezeték hossz [calc.]	5000
Termék súlya	3500 g
Vezeték keresztmetszet, bemeneti oldal	0,5 mm ²
Szélesség	800 mm
Magasság	140 mm

Hőmérséklet és működési feltételek

Termék adatlap

Hőmérséklet-tartomány működéskor	-20...+85 °C ¹⁾
Hőmérséklet-tartomány tároláskor	-40...85 °C

¹⁾ Exceeding the maximum ratings will reduce expected life time or destroy the LED strip.

További termékadatok

Utód EAN	4062172032605, 4062172032629
ID of contained light source [AGGR]	LS_TRV_286066

Tanúsítványok és szabványok

Szabványok	CE/ENEC/EAC
Energy efficiency class of the contained light source	F

Logisztikai adatok

Commodity code	85395100000
----------------	-------------

Környezetvédelmi információk

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	09-06-2023
Primary Article Identifier	4062172189354
Candidate List Substance 1	Lead
CAS No. of substance 1	7439-92-1
Safe Use Instruction	The identification of the Candidate List substance is sufficient to allow safe use of the article.
Declaration No. in SCIP database	6dfc036b-ceb0-4e6b-9095-48384a422e91

Equipment / Accessories

- Simplified connection with optional matching CONNECTsystem
- Perfectly matched with OTi DALI 50/80 4CH DT6/8 and OTi DALI 160 2CH DT6/8
- Perfectly matched with OTi BLE 80/220-240/24 4CH

Adatlap szöveg

- not relevant
- not relevant
- not relevant
- Avoid installations in rural and urban areas with high industrial activity and heavy traffic (higher than class than 4C1 according IEC 60721-3) and as well as installation in spa, areas with chlorine atmosphere, direct exposure to blown sand.

Download Data

Termék adatlap

File	
	User instruction LINEARlight FLEX, Tunable White
	Product Datasheet LINEARlight Flex Tunable White CRI90 Specification Sheet (EN)
	Brochures Light is freedom of design (EN)
	Certificates VDE ENEC CERTIFICATE 40052516 160823
	Certificates LF(P) TW G5 CB 180121
	Declarations of conformity LR FLEX TW2 CE 4249165 02 020823
	Eulmdat LF3400TW-G5-927.957-03 L1 LTD 130421
	IES data LF3400TW-G5-927.957-03 L1 IES 130421

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logisztikai adatok

Termékkód	Termékmegnevezés	Csomagolás (darab/egység)	Méretek (hosszúság x szélesség x magasság)	Térfogat	Bruttó súly
4062172189354	LF3400TW-G5 -927.957-03 L1	Karton 8	241 mm x 195 mm x 205 mm	9.63 dm ³	1213.00 g

Termék adatlap

Logisztikai adatok

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Opcionális tartozékok

Termékmegnevezés	Tartozékok neve	Tartozékok kódja
LF3400TW-G5 -927.957-03 L1	CORNER-FLEX -4P-003 KIT 10PCS	▶ 4062172179638
LF3400TW-G5 -927.957-03 L1	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
LF3400TW-G5 -927.957-03 L1	CONN-FLEX -3P-050 KIT 10PCS	▶ 4062172179690
LF3400TW-G5 -927.957-03 L1	CONN-FLEX -3P-200 KIT 10PCS	▶ 4062172179720
LF3400TW-G5 -927.957-03 L1	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
LF3400TW-G5 -927.957-03 L1	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
LF3400TW-G5 -927.957-03 L1	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
LF3400TW-G5 -927.957-03 L1	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
LF3400TW-G5 -927.957-03 L1	FX -SC08-G2-CT4PJ	▶ 4052899464858

Lemondás

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.