


LFD400MT -G1-GR-03

LINEARlight FLEX DIFFUSE Top Monochrome | – LED modules for professional and industrial applications

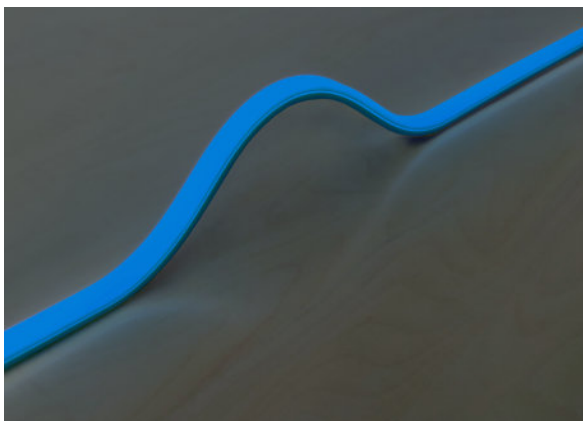

A termék előnyei

- Reliable connection over long periods of time: IP67 connector with built-in protection against liquids penetrating through the wires into the LED strip

Alkalmazási területek

- Signage and illuminated advertising



Műszaki adatok


Elektromos adatok

Névleges teljesítmény / m	12,0 W
---------------------------	--------

Fotometriai adatok

Névleges domináns hullámhossz	525...539 nm
Fényáram / m	285 lm
Fényáram	855 lm

Méretetek és súly

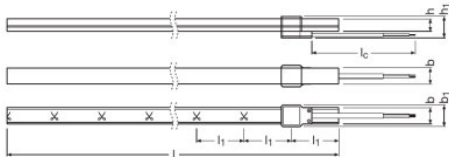

Termék súlya	531.00 g
Hosszúság	3000 mm
Szélesség	14.1 mm
Magasság	10.0 mm

További termékadatok

Product remark	Modules perfectly matched to OSRAM OPTOTRONIC LED drivers (see relevant table)/For current photometric data and important safety, installation and application information (see www.osram.com/led-systems)/All the technical parameters apply to the entire module. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values
----------------	--

Logisztikai adatok

Commodity code	853951000000
----------------	--------------

Környezetvédelmi információk

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	12-02-2022
Primary Article Identifier	4052899450851
Declaration No. in SCIP database	In work

Adatlap szöveg

- not relevant
- not relevant
- not relevant
- Avoid installations in rural and urban areas with high industrial activity and heavy traffic (higher than class than 4C1 according IEC 60721-3) and as well as installation in spa, areas with chlorine atmosphere, direct exposure to blown sand.

Download Data

File	
	User instruction LINEARLIGHT Flex Diffuse Installation Guide - Naed Version (EN)
	Product Datasheet LINEARlight FLEX DIFFUSE Top Specification Sheet (EN)
	Brochures Light is freedom of design (EN)
	Certificates VDE-ENEC Certificate
	Certificates UL Certificate
	Certificates CB TEST CERTIFICATE DE-57743
	Declarations of conformity Flex Diffuse CE 3557934 221121
	Declarations of conformity 726048_Manufacturer Declaration_LINEARlight Flex Diffuse
	Eulumdat 727787_Eulumdat_LFD400MT- G1-GR-03.ltd
	Eulumdat Eulumdat LFD400MT-G1-GR-03
	IES data 727814_IES data_LFD400MT- G1-GR-03.ies
	IES data IES LFD400MT- G1-GR-03

Termék adatlap

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logisztikai adatok

Termékkód	Termékmegnevezés	Csomagolás (darab/egység)	Méretek (hosszúság x szélesség x magasság)	Térfogat	Bruttó súly
4052899450851	LFD400MT -G1-GR-03	Karton 6	519 mm x 246 mm x 525 mm	67.03 dm ³	10304.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Kötelező tartozékok

Termékmegnevezés	Tartozékok neve	Tartozékok kódja
LFD400MT -G1-GR-03	FX-DCS -G1-CM2PF-IP67-500-X5	▶ 4052899451971

Opcionális tartozékok

Termékmegnevezés	Tartozékok neve	Tartozékok kódja
LFD400MT -G1-GR-03	FX-LFDM -G1-BT-17H11	▶ 4052899452480
LFD400MT -G1-GR-03	FX-LFDM -G1-BTL-17H11E9	▶ 4052899452510
LFD400MT -G1-GR-03	FX-DCS -G1-CM2PF-IP67-TOPKIT5	▶ 4052899451995
LFD400MT -G1-GR-03	FX-DCS -G1-CM2PJ-IP67-0190-X5	▶ 4052899452039

Termék adatlap

LFD400MT -G1-GR-03	FX-DCS -G1-CM2PJ-IP67-TOPKIT5	▶ 4052899452053
LFD400MT -G1-GR-03	FX-DCS -G1-ECT-KIT20	▶ 4052899452107
LFD400MT -G1-GR-03	FX-DCS -G1-EHT-KIT20	▶ 4052899452176
LFD400MT -G1-GR-03	FX-DCS -G1-GL-25	▶ 4052899452244

Lemondás

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.