

OPTOTRONIC FIT CS Track

Compact constant current LED driver – Non dimmable



A termék jellemzői

- Supply voltage: 220...240 V
- Line frequency: 50 Hz | 60 Hz
- Line voltage: 198...264 V
- Lifetime: up to 50,000 h (temperature at $T_c = 75\text{ °C}$, max. 10 % failure rate)

A termék előnyei

- High flexibility due to four different output currents per type

Termékcsalád adatlap

Műszaki adatok

Termékmegnevezés	Elektromos adatok					
	Névleges bemeneti feszültség	Hálózati frekvencia [calc.]	Bemeneti feszültség, AC	Teljes harmonikus torzítás	Teljesítménytényező, λ	Efficiency in full-load
OT FIT 20/220-240/500 CS T-B	220...240 V	50 Hz/60 Hz	198...264 V	< 10 % ¹⁾	0.93C...0.98 ²⁾	85 % ³⁾
OT FIT 20/220-240/500 CS T-G	220...240 V	50 Hz/60 Hz	198...264 V	< 10 % ¹⁾	0.98 ²⁾	85 % ³⁾
OT FIT 20/220-240/500 CS T-W	220...240 V	50 Hz/60 Hz	198...264 V	< 10 % ¹⁾	0.93C...0.98 ²⁾	85 % ³⁾
OT FIT 30/220-240/800 CS T-B	220...240 V	50 Hz/60 Hz	198...264 V	< 10 % ¹⁾	0.89C...0.97 ²⁾	88 % ³⁾
OT FIT 30/220-240/800 CS T-G	220...240 V	50 Hz/60 Hz	198...264 V	< 10 % ¹⁾	0.86C...0.97 ²⁾	87 % ³⁾
OT FIT 30/220-240/800 CS T-W	220...240 V	50 Hz/60 Hz	198...264 V	< 10 % ¹⁾	0.89C...0.97 ²⁾	87 % ³⁾
OT FIT 40/220-240/1A0 CS T-B	220...240 V	50 Hz/60 Hz	198...264 V	< 10 % ¹⁾	0.91C...0.97 ²⁾	88.5 % ³⁾
OT FIT 40/220-240/1A0 CS T-G	220...240 V	50 Hz/60 Hz	198...264 V	< 10 % ¹⁾	0.91C...0.97 ²⁾	88.5 % ³⁾
OT FIT 40/220-240/1A0 CS T-W	220...240 V	50 Hz/60 Hz	198...264 V	< 10 % ¹⁾	0.91C...0.97 ²⁾	88.5 % ³⁾

Termékmegnevezés	Készülék vesztesége	Védővezető árama	Bemelegedési áram	Megszakítón megengedett előtét db 10 A (B)	Megszakítón megengedett előtét db 16 A (B)	Lökőfeszültség-állóság, (L/N-föld)
OT FIT 20/220-240/500 CS T-B	3,7 W ⁴⁾	<0,7 mA	≤ 16 A ⁵⁾	30	50	2 kV
OT FIT 20/220-240/500 CS T-G	3,7 W ⁴⁾	<0,7 mA	≤ 16 A ¹⁴⁾	30	50	2 kV
OT FIT 20/220-240/500 CS T-W	3,7 W ⁴⁾	<0,7 mA	≤ 16 A ¹⁴⁾	30	50	2 kV
OT FIT 30/220-240/800 CS T-B	4,4 W ¹⁶⁾	<0,7 mA	≤ 20 A ¹⁴⁾	15	25	2 kV
OT FIT 30/220-240/800 CS T-G	4,4 W ¹⁶⁾	<0,7 mA	≤ 20 A ¹⁴⁾	15	25	2 kV
OT FIT 30/220-240/800 CS T-W	4,4 W ¹⁶⁾	<0,7 mA	≤ 20 A ¹⁴⁾	15	25	2 kV
OT FIT 40/220-240/1A0 CS T-B	5,5 W ¹⁷⁾	<0,7 mA	≤ 20 A ¹⁴⁾	15	25	2 kV
OT FIT 40/220-240/1A0 CS T-G	5,5 W ¹⁷⁾	<0,7 mA	≤ 20 A ¹⁴⁾	15	25	2 kV
OT FIT 40/220-240/1A0 CS T-W	5,5 W ¹⁷⁾	<0,7 mA	≤ 20 A ¹⁴⁾	15	25	2 kV

Termékmegnevezés	Lökőfeszültség-állóság, (L-N)	Névleges kimeneti feszültség	U-OUT (üzemi feszültség)	Névleges kimeneti áram	Kimeneti áram tűrés
OT FIT 20/220-240/500 CS T-B	1 kV	25...42 V	60 V	250 / 350 / 450 / 500 mA	±7.5 %
OT FIT 20/220-240/500 CS T-G	1 kV	25...42 V	60 V	250 / 350 / 450 / 500 mA	±7.5 %
OT FIT 20/220-240/500 CS T-W	1 kV	25...42 V	60 V	250 / 350 / 450 / 500 mA	±7.5 %

Termékcsalád adatlap

Termékmegnevezés	Lökőfeszültség-állóság, (L-N)	Névleges kimeneti feszültség	U-OUT (üzemi feszültség)	Névleges kimeneti áram	Kimeneti áram tűrés
OT FIT 30/220-240/800 CS T-B	1 kV	25...42 V	60 V	600 / 700 / 750 / 800 mA	±7.5 %
OT FIT 30/220-240/800 CS T-G	1 kV	25...42 V	60 V	600 / 700 / 750 / 800 mA	±7.5 %
OT FIT 30/220-240/800 CS T-W	1 kV	25...42 V	60 V	600 / 700 / 750 / 800 mA	±7.5 %
OT FIT 40/220-240/1A0 CS T-B	1 kV	27...42 V	60 V	850 / 900 / 950 / 1050 mA	±7.5 %
OT FIT 40/220-240/1A0 CS T-G	1 kV	27...42 V	60 V	850 / 900 / 950 / 1050 mA	±7.5 %
OT FIT 40/220-240/1A0 CS T-W	1 kV	27...42 V	60 V	850 / 900 / 950 / 1050 mA	±7.5 %

Termékmegnevezés	Default output current	Kimeneti ripple áram (100 Hz)	Output PSTLM	Output SVM
OT FIT 20/220-240/500 CS T-B	500 mA	< 5 % ⁶⁾	≤1	≤0.4
OT FIT 20/220-240/500 CS T-G	500 mA	< 5 % ⁶⁾	≤1	≤0.4
OT FIT 20/220-240/500 CS T-W	500 mA	< 5 % ⁶⁾	≤1	≤0.4
OT FIT 30/220-240/800 CS T-B	800 mA	< 5 % ⁶⁾	≤1	≤0.4
OT FIT 30/220-240/800 CS T-G	800 mA	< 5 % ⁶⁾	≤1	≤0.4
OT FIT 30/220-240/800 CS T-W	800 mA	< 5 % ⁶⁾	≤1	≤0.4
OT FIT 40/220-240/1A0 CS T-B	1050 mA	< 5 % ⁶⁾	≤1	≤0.4
OT FIT 40/220-240/1A0 CS T-G	1050 mA	< 5 % ⁶⁾	≤1	≤0.4
OT FIT 40/220-240/1A0 CS T-W	1050 mA	< 5 % ⁶⁾	≤1	≤0.4

				Méretek és súly	
Termékmegnevezés	Névleges kimeneti teljesítmény	Legnagyobb kimenő teljesítmény	Current set	Termék súlya	Vezeték keresztmetszet, kimeneti oldal
OT FIT 20/220-240/500 CS T-B	6.3...21 W	21 W	DipSwitch	44.80 g	0,2...0,75 mm ²
OT FIT 20/220-240/500 CS T-G	6.3...21 W	21 W	DipSwitch	44.80 g	0,2...0,75 mm ² ₁₅₎
OT FIT 20/220-240/500 CS T-W	6.3...21 W	21 W	DipSwitch	44.80 g	0,2...0,75 mm ²
OT FIT 30/220-240/800 CS T-B	15...33.6 W	33.6 W	DipSwitch	63.40 g	0,2...0,75 mm ²
OT FIT 30/220-240/800 CS T-G	15...33.6 W	33.6 W	DipSwitch	63.40 g	0,2...0,75 mm ²
OT FIT 30/220-240/800 CS T-W	15...33.6 W	33.6 W	DipSwitch	63.40 g	0,2...0,75 mm ²
OT FIT 40/220-240/1A0 CS T-B	23...44.1 W	44.1 W	DipSwitch	63.60 g	0,2...0,75 mm ²
OT FIT 40/220-240/1A0 CS T-G	23...44.1 W	44.1 W	DipSwitch	63.60 g	0,2...0,75 mm ²
OT FIT 40/220-240/1A0 CS T-W	23...44.1 W	44.1 W	DipSwitch	63.60 g	0,2...0,75 mm ²

Termékcsalád adatlap

Termékmegnevezés	Vezeték- előkészítési hossz, kimenet	Hosszúság	Szélesség	Magasság	Szín és anyag	
					Ház anyaga	Termék színe
OT FIT 20/220-240/500 CS T-B	7...8 mm	162.0 mm	32.0 mm	41 mm	Plastic	BLACK RAL 9011
OT FIT 20/220-240/500 CS T-G	7...8 mm	162.0 mm	32.0 mm	41 mm	Plastic	GREY RAL 7040
OT FIT 20/220-240/500 CS T-W	7...8 mm	162.0 mm	32.0 mm	41 mm	Plastic	WHITE RAL 9010
OT FIT 30/220-240/800 CS T-B	7...8 mm	162.0 mm	32.0 mm	41 mm	Plastic	BLACK RAL 9011
OT FIT 30/220-240/800 CS T-G	7...8 mm	162.0 mm	32.0 mm	41 mm	Plastic	GREY RAL 7040
OT FIT 30/220-240/800 CS T-W	7...8 mm	162.0 mm	32.0 mm	41 mm	Plastic	WHITE RAL 9010
OT FIT 40/220-240/1A0 CS T-B	7...8 mm	162.0 mm	32.0 mm	41 mm	Plastic	BLACK RAL 9011
OT FIT 40/220-240/1A0 CS T-G	7...8 mm	162.0 mm	32.0 mm	41 mm	Plastic	GREY RAL 7040
OT FIT 40/220-240/1A0 CS T-W	7...8 mm	162.0 mm	32.0 mm	41 mm	Plastic	WHITE RAL 9010

Termékmegnevezés	Hőmérséklet és működési feltételek				
	Környezeti hőmérséklet tartomány	Max. hőmérséklet a tc mérőponton	Max. házhőmérséklet hibaállapotban	Hőmérséklet- tartomány tároláskor	Megeng edett légnedv esség üzem közben
OT FIT 20/220-240/500 CS T-B	-20...+35 °C	75 °C ⁷⁾	110 °C	-20...80 °C ⁸⁾	5...85 % ⁹⁾
OT FIT 20/220-240/500 CS T-G	-20...+35 °C	75 °C ⁷⁾	110 °C	-20...80 °C ⁸⁾	5...85 % ⁹⁾
OT FIT 20/220-240/500 CS T-W	-20...+35 °C	75 °C ⁷⁾	110 °C	-20...80 °C ⁸⁾	5...85 % ⁹⁾
OT FIT 30/220-240/800 CS T-B	-20...+35 °C	75 °C ⁷⁾	110 °C	-20...80 °C ⁸⁾	5...85 % ⁹⁾
OT FIT 30/220-240/800 CS T-G	-20...+35 °C	75 °C ⁷⁾	110 °C	-20...80 °C ⁸⁾	5...85 % ⁹⁾
OT FIT 30/220-240/800 CS T-W	-20...+35 °C	75 °C ⁷⁾	110 °C	-20...80 °C ⁸⁾	5...85 % ⁹⁾
OT FIT 40/220-240/1A0 CS T-B	-20...+35 °C	75 °C ⁷⁾	110 °C	-20...80 °C ⁸⁾	5...85 % ⁹⁾
OT FIT 40/220-240/1A0 CS T-G	-20...+35 °C	75 °C ⁷⁾	110 °C	-20...80 °C ⁸⁾	5...85 % ⁹⁾
OT FIT 40/220-240/1A0 CS T-W	-20...+35 °C	75 °C ⁷⁾	110 °C	-20...80 °C ⁸⁾	5...85 % ⁹⁾

Termékcsalád adatlap

Termékmegnevezés	Élettartam	További termékadatok		
	Elektronikus előtét élettartam	Utód EAN	Compatible track systems	Utód EAN
OT FIT 20/220-240/500 CS T-B	50000 h ¹⁰⁾	4062172379847	Nuco / Ivela / EUTRAC / GLOBAL / STAFF / NORLUX ¹¹⁾	
OT FIT 20/220-240/500 CS T-G	50000 h ¹⁰⁾	4062172379861	Nuco / Ivela / EUTRAC / GLOBAL / STAFF / NORLUX ¹¹⁾	
OT FIT 20/220-240/500 CS T-W	50000 h ¹⁰⁾	4062172379885	Nuco / Ivela / EUTRAC / GLOBAL / STAFF / NORLUX ¹¹⁾	
OT FIT 30/220-240/800 CS T-B	50000 h ¹⁰⁾	4062172379847	Nuco / Ivela / EUTRAC / GLOBAL / STAFF / NORLUX ¹¹⁾	4062172028479
OT FIT 30/220-240/800 CS T-G	50000 h ¹⁰⁾	4062172379861	Nuco / Ivela / EUTRAC / GLOBAL / STAFF / NORLUX ¹¹⁾	
OT FIT 30/220-240/800 CS T-W	50000 h ¹⁰⁾	4062172379885	Nuco / Ivela / EUTRAC / GLOBAL / STAFF / NORLUX ¹¹⁾	4062172028493
OT FIT 40/220-240/1A0 CS T-B	50000 h ¹⁰⁾	4062172379908	Nuco / Ivela / EUTRAC / GLOBAL / STAFF / NORLUX ¹¹⁾	
OT FIT 40/220-240/1A0 CS T-G	50000 h ¹⁰⁾	4062172379922	Nuco / Ivela / EUTRAC / GLOBAL / STAFF / NORLUX ¹¹⁾	
OT FIT 40/220-240/1A0 CS T-W	50000 h ¹⁰⁾	4062172379946	Nuco / Ivela / EUTRAC / GLOBAL / STAFF / NORLUX ¹¹⁾	

Termékmegnevezés	Képességek			
	Dimmelhető	Túlmelegedés védelem	Túlterhelés védelem	Zárlatvédett
OT FIT 20/220-240/500 CS T-B	No	Automatic reversible	Yes	Yes
OT FIT 20/220-240/500 CS T-G	No	Automatic reversible	Yes	Yes
OT FIT 20/220-240/500 CS T-W	No	Automatic reversible	Yes	Yes
OT FIT 30/220-240/800 CS T-B	No	Automatic reversible	Yes	Yes
OT FIT 30/220-240/800 CS T-G	No	Automatic reversible	Yes	Yes
OT FIT 30/220-240/800 CS T-W	No	Automatic reversible	Yes	Yes

Termékcsalád adatlap

Termékmegnevezés	Képességek			
	Dimmelhető	Túlmelegedés védelem	Túlterhelés védelem	Zárlatvédett
OT FIT 40/220-240/1A0 CS T-B	No	Automatic reversible	Yes	Yes
OT FIT 40/220-240/1A0 CS T-G	No	Automatic reversible	Yes	Yes
OT FIT 40/220-240/1A0 CS T-W	No	Automatic reversible	Yes	Yes

Termékmegnevezés	Nem terhelés-védett	Intended for no-load operation	Max. vezetékho sz lámpa/LED modul	Alkalmasság érintésvédelmi osztályhoz
OT FIT 20/220-240/500 CS T-B	Yes	Nem	2,0 m ¹²⁾	II
OT FIT 20/220-240/500 CS T-G	Yes	Nem	2,0 m ¹²⁾	II
OT FIT 20/220-240/500 CS T-W	Yes	Nem	2,0 m ¹²⁾	II
OT FIT 30/220-240/800 CS T-B	Yes	Nem	2,0 m ¹²⁾	II
OT FIT 30/220-240/800 CS T-G	Yes	Nem	2,0 m ¹²⁾	II
OT FIT 30/220-240/800 CS T-W	Yes	Nem	2,0 m ¹²⁾	II
OT FIT 40/220-240/1A0 CS T-B	Yes	Nem	2,0 m ¹²⁾	II
OT FIT 40/220-240/1A0 CS T-G	Yes	Nem	2,0 m ¹²⁾	II
OT FIT 40/220-240/1A0 CS T-W	Yes	Nem	2,0 m ¹²⁾	II

Termékmegnevezés	Csatlakozás típusa, bemeneti oldal	Csatlakozás típusa, kimeneti oldal	Number of channels	Átmenő huzalozásra alkalmas
OT FIT 20/220-240/500 CS T-B	-	Nyomógombos kapocs	1	nem releváns
OT FIT 20/220-240/500 CS T-G	-	Nyomógombos kapocs	1	nem releváns
OT FIT 20/220-240/500 CS T-W	-	Nyomógombos kapocs	1	nem releváns
OT FIT 30/220-240/800 CS T-B	-	Nyomógombos kapocs	1	nem releváns
OT FIT 30/220-240/800 CS T-G	-	Nyomógombos kapocs	1	nem releváns
OT FIT 30/220-240/800 CS T-W	-	Nyomógombos kapocs	1	nem releváns
OT FIT 40/220-240/1A0 CS T-B	-	Nyomógombos kapocs	1	nem releváns
OT FIT 40/220-240/1A0 CS T-G	-	Nyomógombos kapocs	1	nem releváns
OT FIT 40/220-240/1A0 CS T-W	-	Nyomógombos kapocs	1	nem releváns

Termékcsalád adatlap

Termékmegnevezés	Programming	Tanúsítványok és szabványok		
	Programming device	Jóváhagyási jelek	Szabványok	Védettség típusa
OT FIT 20/220-240/500 CS T-B	DIPswitch	CE / ENEC / EAC / CQC / RCM ¹³⁾	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to CISPR 15/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547	IP20
OT FIT 20/220-240/500 CS T-G	DIPswitch	CE / CCC / ENEC / EAC / CQC ¹³⁾	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to CISPR 15/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547	IP20
OT FIT 20/220-240/500 CS T-W	DIPswitch	CE / CCC / ENEC / EAC / CQC ¹³⁾	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to CISPR 15/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547	IP20
OT FIT 30/220-240/800 CS T-B	DIPswitch	CE / ENEC / EAC / CQC / RCM ¹³⁾	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to CISPR 15/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547	IP20
OT FIT 30/220-240/800 CS T-G	DIPswitch	CE / ENEC / EAC / CQC / RCM ¹³⁾	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to CISPR 15/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547	IP20
OT FIT 30/220-240/800 CS T-W	DIPswitch	CE / ENEC / EAC / CQC / RCM ¹³⁾	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to CISPR 15/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547	IP20
OT FIT 40/220-240/1A0 CS T-B	DIPswitch	CE / ENEC / EAC / CQC / RCM ¹³⁾	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to CISPR 15/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547	IP20
OT FIT 40/220-240/1A0 CS T-G	DIPswitch	CE / ENEC / EAC / CQC / RCM ¹³⁾	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to CISPR 15/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547	IP20
OT FIT 40/220-240/1A0 CS T-W	DIPswitch	CE / ENEC / EAC / CQC / RCM ¹³⁾	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to CISPR 15/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547	IP20

Termékcsalád adatlap

		Logisztikai adatok	Környezetvédelmi információk Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Termékmegnevezés	Érintésvédelmi osztály	Commodity code	Date of Declaration	Primary Article Identifier
OT FIT 20/220-240/500 CS T-B	II	85044083900	21-11-2023	4052899617230
OT FIT 20/220-240/500 CS T-G	II	85044083900	21-11-2023	4062172131773
OT FIT 20/220-240/500 CS T-W	II	85044083900	21-11-2023	4062172131759
OT FIT 30/220-240/800 CS T-B	II	85044083900	21-11-2023	4052899617247
OT FIT 30/220-240/800 CS T-G	II	85044083900	21-11-2023	4062172131810
OT FIT 30/220-240/800 CS T-W	II	85044083900	21-11-2023	4062172131797
OT FIT 40/220-240/1A0 CS T-B	II	85044083900	21-11-2023	4052899617254
OT FIT 40/220-240/1A0 CS T-G	II	85044083900	21-11-2023	4062172131858
OT FIT 40/220-240/1A0 CS T-W	II	85044083900	21-11-2023	4062172131834


Termékmegnevezés	Candidate List Substance 1	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
OT FIT 20/220-240/500 CS T-B	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	c06d8145-d1e7-4f76-a928-c70eae2705bb
OT FIT 20/220-240/500 CS T-G	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	149ac4e3-622c-43f7-ab47-5ecc4a9dc35d
OT FIT 20/220-240/500 CS T-W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	eae7fe85-3692-449a-ab39-d733c3ed3734
OT FIT 30/220-240/800 CS T-B	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	5dab5d92-4b49-4f94-98c7-032b6bd33659
OT FIT 30/220-240/800 CS T-G	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	cedf1ac5-70a7-498c-9428-6eb6450678f2
OT FIT 30/220-240/800 CS T-W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	41eb59b7-fae3-4f86-875b-2927bb19b5ec

Termékcsalád adatlap


Termékmegnevezés	Candidate List Substance 1	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
OT FIT 40/220-240/1A0 CS T-B	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	d8a0cff2-d98d-4a52-a39f-a2b50ba4cd57
OT FIT 40/220-240/1A0 CS T-G	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	0642b690-a9bc-4fe0-9862-69362f2f9dc9
OT FIT 40/220-240/1A0 CS T-W	Lead	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	af03b908-4c08-4bec-bce4-aa6fd3eaf35d

- 1) Full load, 230V, 50 Hz
- 2) Full load at 230 V/50 Hz
- 3) at 230 V, 50 Hz
- 4) At 230 V, Input power 24.7 W max.
- 5) $t_{width} = 200 \mu s$ (measured at 50 % I_{peak})
- 6) Ripple / average @ 100 Hz
- 7) Measured on tc point indicated of the product label.
- 8) Cool down before operating
- 9) Lecsapódás nélkül
- 10) Maximum $T_c = 75^{\circ}C$ / 10% meghibásodási arány
- 11) The compatibility may become invalid when the critical track dimension is modified by the brand owner in case of engineering change or optimization in the future
- 12) Output wires must be routed as close as possible to each other
- 13) In preparation
- 14) $t_{szélesség} = 200 \mu s$ (mérve: 50 % I_{peak})
- 15) Solid or flexible leads
- 16) At 230 V, Input power 38 W max.
- 17) At 230 V, Input power 49.6 W max.

Termékcsalád adatlap

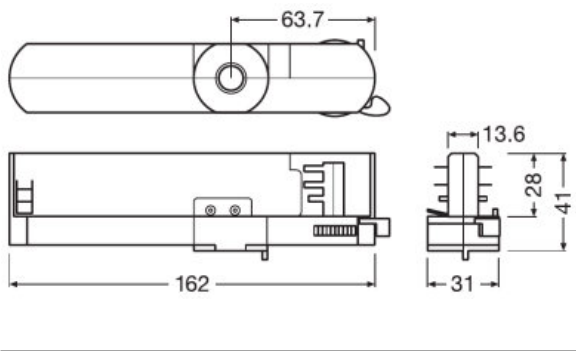

line drawing of OT FTI 20 30 40 T

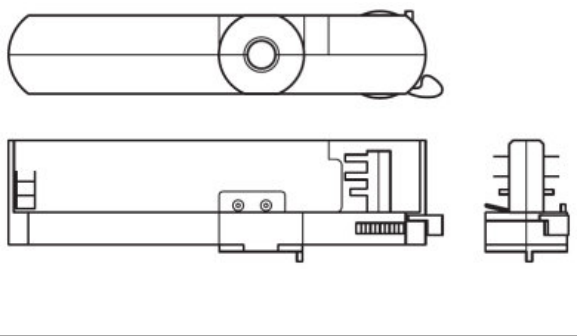

line drawing of OT FTI 20 30 40 T

Használati tanácsok

További részletes alkalmazási információkat és grafikákat a termék adatlapján talál.

Sales and Technical Support

Sales and Technical Support www.osram.com

Download Data

File	
	User instruction OPTOTRONIC LED Power Supply
	Certificates OT FIT CS T ENEC 35 112153 180423
	Declarations of conformity OT FIT CS T CE 4177698 220322
	Declarations of conformity OT FIT CS T UK DoC 4281105 220322
	CAD data OT FIT 20 30 40 CS T STEP 210521

Termékcsalád adatlap

Ecodesign regulation information:

Intended for use with LED modules.
The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logisztikai adatok

Termékkód	Termékmegnevezés	Csomagolás (darab/egység)	Méretek (hosszúság x szélesség x magasság)	Térfogat	Bruttó súly
4052899617230	OT FIT 20/220-240/500 CS T-B	Karton 20	425 mm x 241 mm x 141 mm	14.44 dm ³	1443.00 g
4062172131773	OT FIT 20/220-240/500 CS T-G	Karton 20	425 mm x 241 mm x 141 mm	14.44 dm ³	2547.00 g
4062172131759	OT FIT 20/220-240/500 CS T-W	Karton 20	425 mm x 241 mm x 141 mm	14.44 dm ³	1443.00 g
4052899617247	OT FIT 30/220-240/800 CS T-B	Karton 20	425 mm x 241 mm x 141 mm	14.44 dm ³	1815.00 g
4062172131810	OT FIT 30/220-240/800 CS T-G	Karton 20	425 mm x 241 mm x 141 mm	14.44 dm ³	2947.00 g
4062172131797	OT FIT 30/220-240/800 CS T-W	Karton 20	425 mm x 241 mm x 141 mm	14.44 dm ³	2947.00 g
4052899617254	OT FIT 40/220-240/1A0 CS T-B	Karton 20	425 mm x 241 mm x 141 mm	14.44 dm ³	2947.00 g
4062172131858	OT FIT 40/220-240/1A0 CS T-G	Karton 20	425 mm x 241 mm x 141 mm	14.44 dm ³	1819.00 g
4062172131834	OT FIT 40/220-240/1A0 CS T-W	Karton 20	425 mm x 241 mm x 141 mm	14.44 dm ³	2947.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Opcionális tartozékok

Termékmegnevezés	Tartozékok neve	Tartozékok kódja
OT FIT 20/220-240/500 CS T-B	Track Joint	▶ 4062172228183
OT FIT 20/220-240/500 CS T-B	BLACK RING	▶ 4062172138567
OT FIT 20/220-240/500 CS T-G	Track Joint	▶ 4062172228183

Termékcsalád adatlap

OT FIT 20/220-240/500 CS T-G	GREY RING	▶ 4062172138543
OT FIT 20/220-240/500 CS T-W	Track Joint	▶ 4062172228183
OT FIT 20/220-240/500 CS T-W	WHITE RING	▶ 4062172138550
OT FIT 30/220-240/800 CS T-B	Track Joint	▶ 4062172228183
OT FIT 30/220-240/800 CS T-B	BLACK RING	▶ 4062172138567
OT FIT 30/220-240/800 CS T-G	Track Joint	▶ 4062172228183
OT FIT 30/220-240/800 CS T-G	GREY RING	▶ 4062172138543
OT FIT 30/220-240/800 CS T-W	Track Joint	▶ 4062172228183
OT FIT 30/220-240/800 CS T-W	WHITE RING	▶ 4062172138550
OT FIT 40/220-240/1A0 CS T-B	Track Joint	▶ 4062172228183
OT FIT 40/220-240/1A0 CS T-B	BLACK RING	▶ 4062172138567
OT FIT 40/220-240/1A0 CS T-G	Track Joint	▶ 4062172228183
OT FIT 40/220-240/1A0 CS T-G	GREY RING	▶ 4062172138543
OT FIT 40/220-240/1A0 CS T-W	Track Joint	▶ 4062172228183
OT FIT 40/220-240/1A0 CS T-W	WHITE RING	▶ 4062172138550

Lemondás

A változtatás jogát fenntartjuk. Hibák és mulasztások kizárva. Mindig győződjön meg arról, hogy a legújabb kiadást használja.