

PL-LIN-Z6 4000-830 560X20-HV

PrevaLED Linear G6 | Linear Light Engines



A termék jellemzői

- Available with luminous flux: 2,200 lm or 4,000 lm on 560 mm

A termék előnyei

- High voltage (HV) optimized for non-isolated, low voltage (LV) optimized for SELV operation

Alkalmazási területek

- Office
- Industry



Műszaki adatok

Elektromos adatok

Névleges feszültség	853 V
Névleges áram	025 A
Áram típusa	DC
On-mode power [AGGR]	22.00 W
Energy consumption in on-mode [AGGR]	22.0 kWh/1000h

Fotometriai adatok

Luminous efficacy	176 lm/W
Színvisszaadási index	80
Correlated color temperature CCT [AGGR]	3000 K
Colour consistency (McAdam ellipses) [AGGR]	3
Useful luminous flux (Φuse) [AGGR]	3735 lm


Fénytechnikai adatok

Gyújtási idő	< 01 s
Bemelegedési idő	< 200 s

LED modul információ

LED-ek száma / modul	96
----------------------	----

Méretetek és súly



Termék súlya	4000 g
Height EPREL [AGGR]	5.0 mm
Length EPREL [AGGR]	560.0 mm
Width EPREL [AGGR]	20.0 mm

Hőmérséklet és működési feltételek

Működési hőmérséklet IEC 62717 szerint	50 °C
Hőmérséklet-tartomány működéskor	-20...75 °C
Max. hőmérséklet a tc mérőponton	75 °C
Hőmérséklet-tartomány tároláskor	-30...85 °C
Környezeti hőmérséklet tartomány	-20...+75 °C

Élettartam

Kapcsolási ciklusok száma	100000
Lumen maintenance factor LMF [AGGR]	96
L70B50 lifetime [AGGR]	100000 h

További termékadatok

Lighting technology used [AGGR]	LED
---------------------------------	-----

Tanúsítványok és szabványok

Szabványok	CE/ENEC/VDE
Védettség típusa	IP20
Energy efficiency class [AGGR]	D

Logisztikai adatok


Commodity code	85395100000
----------------	-------------

Környezetvédelmi információk

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	18-04-2022
Primary Article Identifier	4052899606326
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	No declarable substances contained



484525_5 Year Osram Guarante
(GB)

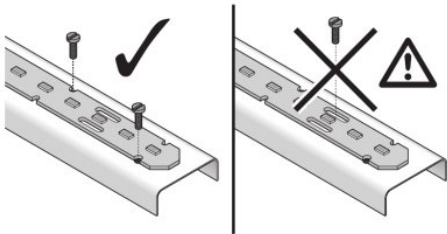

PL LIN G5 G6 Mounting Guidance 251021

Adatlap szöveg

- When parallel wiring, tolerance-related differences in output are possible and may cause deviations in brightness.

Download Data

File	
	User instruction PrevaLED Linear G5 G6
	Certificates PL ENEC 40031612 250723
	Declarations of conformity PL LIN Z6 CE 3812352 090823
	Declarations of conformity EU Declaration of conformity PL-LIN-Z4 family
	Declarations of conformity Declaraton of conformity PL-LIN-Z4

Termék adatlap

	CAD data 3-dim PL LIN Z5 Z6 4000 560x20 HV CADPDF 240220
---	---

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logisztikai adatok

Termékkód	Termékmegnevezés	Csomagolás (darab/egység)	Méretek (hosszúság x szélesség x magasság)	Térfogat	Bruttó súly
4052899606326	PL-LIN-Z6 4000-830 560X20-HV	Karton 60	592 mm x 252 mm x 100 mm	14.92 dm ³	2838.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Lemondás

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.