

OPTOTRONIC Intelligent – DALI (non-isolated)

Linear constant current LED driver – Dimmable



Alkalmazási területek

- Installation in emergency lighting systems according to IEC 61347-2-13, appendix J
- Suitable for luminaires of protection class I

A termék jellemzői

- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Supply voltage: 220...240 V

Műszaki adatok

Elektromos adatok

Termékmegnevezés	Névleges bemeneti feszültség	Hálózati frekvencia [calc.]	Bemeneti feszültség, AC	Bemeneti feszültség DC	Current set
OTi DALI 35/220...240/400 D LT2 L	220...240 V	0/50/60 Hz	198...264 V ¹⁾	176...276 V	DALI / LEDset / Programmable
OTi DALI 60/220...240/550 D LT2 L	220...240 V	50...60 Hz	198...264 V ¹⁾	176...276 V	DALI / LEDset / Programmable
OTi DALI 90/220...240/1A0 LT2 L	220...240 V	50...60 Hz	198...264 V ¹⁾	176...276 V	DALI / LEDset / Programmable
OTi DALI 90/220...240/700 D LT2 L	220...240 V	0/50/60 Hz	198...264 V ¹⁾	176...276 V	DALI / LEDset / Programmable
OTi DALI 100/220...240/750 D NFC L	220...240 V	0/50/60 Hz	198...264 V	176...276 V	DALI / NFC / Programmable

Termékmegnevezés	Teljes harmonikus torzítás	Teljesítménytényező, λ	Efficiency in full-load	Készülék vesztesége	Bemelegedési áram
OTi DALI 35/220...240/400 D LT2 L	< 10 %	0.38C...0.95 ₂₎	92 % ³⁾	4,0 W ⁴⁾	17 A ⁵⁾
OTi DALI 60/220...240/550 D LT2 L	< 10 %	0.52C...0.97 ₂₎	92.5 % ³⁾	5,0 W ⁴⁾	25 A ⁹⁾
OTi DALI 90/220...240/1A0 LT2 L	< 10 %	0.62C...0.99 ₂₎	94 % ³⁾	9,0 W ⁴⁾	25 A ⁹⁾
OTi DALI 90/220...240/700 D LT2 L	< 10 %	0.64C...0.99 ₂₎	93 % ³⁾	9,0 W ⁴⁾	25 A
OTi DALI 100/220...240/750 D NFC L	< 10 %	0.50C...0.98	94 % ³⁾	10 W	≤ 36 A

Termékmegnevezés	Megszakítón megengedett előtét db 10 A (B)	Megszakítón megengedett előtét db 16 A (B)	Előtétek legnagyobb db-száma/megszakító	Lökőfeszültség-állóság, (L/N-föld)	Lökőfeszültség-állóság, (L-N)
OTi DALI 35/220...240/400 D LT2 L	18	28	43	2 kV	1 kV
OTi DALI 60/220...240/550 D LT2 L	15	24	37	2 kV	1 kV
OTi DALI 90/220...240/1A0 LT2 L	15	24	29	2 kV	1 kV
OTi DALI 90/220...240/700 D LT2 L	15	24	-	2 kV	1 kV
OTi DALI 100/220...240/750 D NFC L	13	21	-	2 kV	1 kV

Termékmegnevezés	Névleges kimeneti feszültség	U-OUT (üzemi feszültség)	Névleges kimeneti áram	Output current LEDset open
OTi DALI 35/220...240/400 D LT2 L	54...240 V ⁶⁾	< 250 V	75...400 mA	35 mA
OTi DALI 60/220...240/550 D LT2 L	54...240 V ¹⁰⁾	< 250 V	120...550 mA	60 mA
OTi DALI 90/220...240/1A0 LT2 L	54...240 V ¹⁰⁾	< 250 V	250...1000 mA	125 mA
OTi DALI 90/220...240/700 D LT2 L	54...240 V ¹⁰⁾	< 250 V	250...700 mA	125 mA
OTi DALI 100/220...240/750 D NFC L	54...260 V	< 270 V	100...750 mA	

Termékcsalád adatlap

Termékmegnevezés	Output current LEDset shorted	Default output current	Kimeneti áram tűrés		
OTi DALI 35/220...240/400 D LT2 L	75 mA	35 mA ⁷⁾	±3 % ⁸⁾		
OTi DALI 60/220...240/550 D LT2 L	120 mA	60 mA ⁷⁾	±3 % ⁸⁾		
OTi DALI 90/220...240/1A0 LT2 L	250 mA	125 mA ⁷⁾	±3 % ⁸⁾		
OTi DALI 90/220...240/700 D LT2 L	250 mA	125 mA ⁷⁾	±3 % ⁸⁾		
OTi DALI 100/220...240/750 D NFC L		100 mA	±3 %		

Termékmegnevezés	Kimeneti ripple áram (100 Hz)	Output PSTLM	Output SVM	Névleges kimeneti teljesítmény	
OTi DALI 35/220...240/400 D LT2 L	< 1 %	≤1	≤0.4	4...37 W	
OTi DALI 60/220...240/550 D LT2 L	< 1 %	≤1	≤0.4	6,4...60 W	
OTi DALI 90/220...240/1A0 LT2 L	< 1 %	≤1	≤0.4	13.5...90 W	
OTi DALI 90/220...240/700 D LT2 L	< 1 %	≤1	≤0.4	13.5...90 W	
OTi DALI 100/220...240/750 D NFC L	< 1 %	≤1	≤0.4	5.4...100 W	

Termékmegnevezés	Legnagyobb kimenő teljesítmény	Galvanikus elválasztás	Veszteség i teljesítmény készenléti	Védővezető árama	Megszakítón megengedett előtét db 10 A (B)
OTi DALI 35/220...240/400 D LT2 L	37 W	Non isolated	<0,25 W	<0,5 mA	
OTi DALI 60/220...240/550 D LT2 L	60 W	Non isolated	<0,25 W	<0,5 mA	
OTi DALI 90/220...240/1A0 LT2 L	90 W	Non isolated	<0,25 W	<0,5 mA	
OTi DALI 90/220...240/700 D LT2 L	90 W	Non isolated	<0,25 W	<0,5 mA	
OTi DALI 100/220...240/750 D NFC L	100 W	Non isolated	<0,15 W		-

Termékmegnevezés	Megszakítón megengedett előtét db 16 A (B)	Networked standby power [PIM]
OTi DALI 35/220...240/400 D LT2 L		
OTi DALI 60/220...240/550 D LT2 L		
OTi DALI 90/220...240/1A0 LT2 L		
OTi DALI 90/220...240/700 D LT2 L		
OTi DALI 100/220...240/750 D NFC L	-	≤0.18 W ³⁾

1) Permitted voltage range
2) Full load at 230 V
3) at 230 V, 50 Hz
4) Maximum
5) 170 µs
6) Maximum 350 V
7) LEDset deactivated
8) When use DALI
9) 280 µs
10) Maximum 250 V


Méreték és súly


Termékmegnevezés	Szerelési furattávolság, hosszúság	Termék súlya	Vezeték keresztmetszet, bemeneti oldal	Vezeték keresztmetszet, kimeneti oldal	Vezeték-előkészítési hossz, bemenet
OTi DALI 35/220...240/400 D LT2 L	270,0 mm	205.00 g	0,5...1,5 mm ^{2 1)}	0,5...1,5 mm ^{2 1)}	8,5...9,5 mm
OTi DALI 60/220...240/550 D LT2 L	270,0 mm	205.00 g	0,5...1,5 mm ^{2 1)}	0,5...1,5 mm ^{2 1)}	8,5...9,5 mm
OTi DALI 90/220...240/1A0 LT2 L	270,0 mm	205.00 g	0,5...1,5 mm ^{2 1)}	0,5...1,5 mm ^{2 1)}	8,5...9,5 mm
OTi DALI 90/220...240/700 D LT2 L	270,0 mm	205.00 g	0,5...1,5 mm ²	0,5...1,5 mm ²	8,5...9,5 mm
OTi DALI 100/220...240/750 D NFC L	270,0 mm	203.00 g	0,5...1,5 mm ²	0,5...1,5 mm ²	8,0...9,0 mm

Termékmegnevezés	Vezeték-előkészítési hossz, kimenet	Hosszúság	Magasság	Szélesség
OTi DALI 35/220...240/400 D LT2 L	8,5...9,5 mm	280.0 mm	21.0 mm	30.0 mm
OTi DALI 60/220...240/550 D LT2 L	8,5...9,5 mm	280.0 mm	21.0 mm	30.0 mm
OTi DALI 90/220...240/1A0 LT2 L	8,5...9,5 mm	280.0 mm	21.0 mm	30.0 mm
OTi DALI 90/220...240/700 D LT2 L	8,5...9,5 mm	280.0 mm	21.0 mm	30.0 mm
OTi DALI 100/220...240/750 D NFC L	8,0...9,0 mm	280.0 mm	21.0 mm	30.0 mm

1) Solid or flexible leads

Produkt Strichzeichnungen (vermasst)

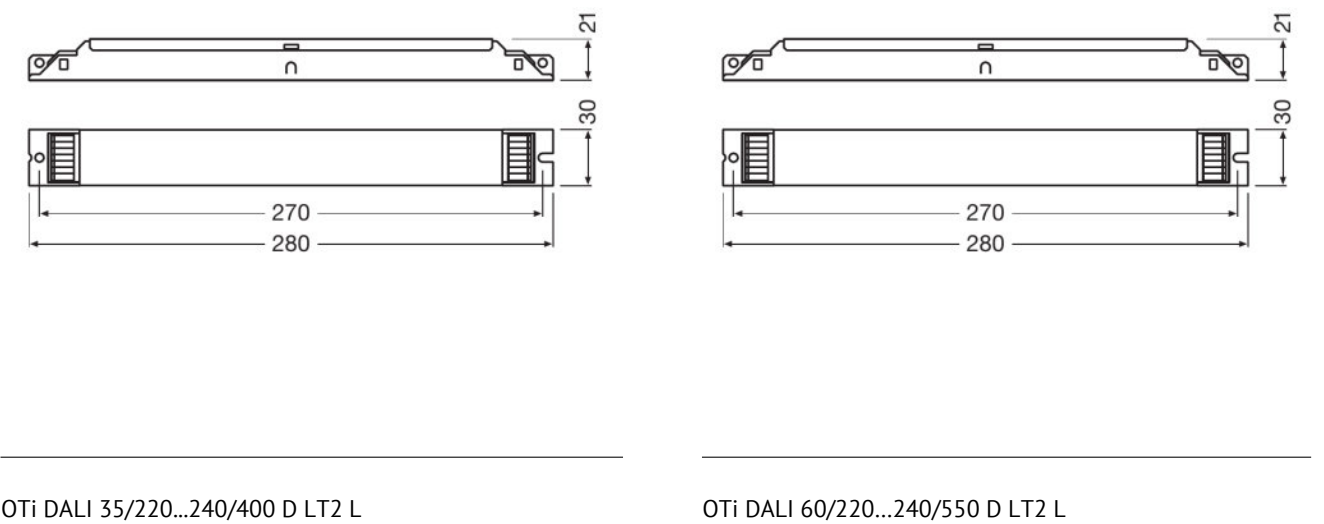

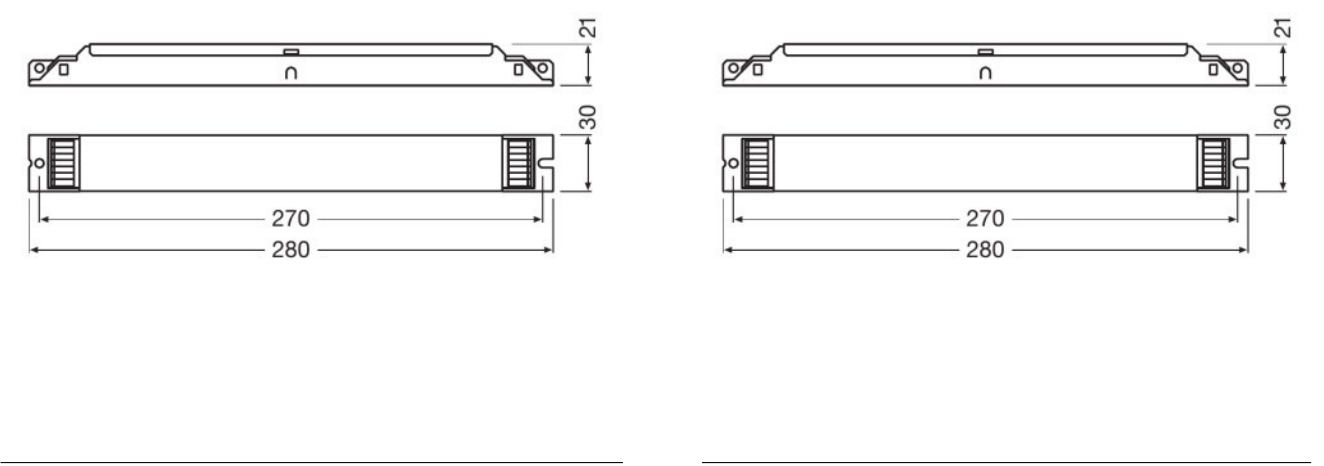

OTi DALI 90/220...240/1A0 LT2 L

OTi DALI 90/220...240/700 D LT2 L

Szín és anyag

Termékmegnevezés	Ház anyaga
OTi DALI 35/220...240/400 D LT2 L	Metal
OTi DALI 60/220...240/550 D LT2 L	Metal
OTi DALI 90/220...240/1A0 LT2 L	Metal
OTi DALI 90/220...240/700 D LT2 L	Metal
OTi DALI 100/220...240/750 D NFC L	Metal

Hőmérséklet és működési feltételek

Termékmegnevezés	Környezeti hőmérséklet tartomány	Max. hőmérséklet a tc mérőponpon	Max. házhőmérséklet hibaállapotban	Hőmérséklet-tartomány tároláskor
OTi DALI 35/220...240/400 D LT2 L	-25...+60 °C	75 °C	110 °C	-25...85 °C
OTi DALI 60/220...240/550 D LT2 L	-25...+60 °C	75 °C	110 °C	-25...85 °C
OTi DALI 90/220...240/1A0 LT2 L	-25...+50 °C	75 °C	110 °C	-25...85 °C
OTi DALI 90/220...240/700 D LT2 L	-25...+50 °C	75 °C	110 °C	-25...85 °C
OTi DALI 100/220...240/750 D NFC L	-25...+50 °C	75 °C	110 °C	-40...+85 °C

Termékmegnevezés	Megengedett légnedvesség üzem közben
OTi DALI 35/220...240/400 D LT2 L	5...85 % ¹⁾
OTi DALI 60/220...240/550 D LT2 L	5...85 % ¹⁾
OTi DALI 90/220...240/1A0 LT2 L	5...85 % ¹⁾
OTi DALI 90/220...240/700 D LT2 L	5...85 % ¹⁾

Termékcsalád adatlap

Termékmegnevezés	Megengedett légnedvesség üzem közben
OTi DALI 100/220...240/750 D NFC L	5...85 % ¹⁾

¹⁾ Maximum 56 nap/év 85 %-on

Élettartam

Termékmegnevezés	Elektronikus előtét élettartam
OTi DALI 35/220...240/400 D LT2 L	50000 / 100000 h ¹⁾
OTi DALI 60/220...240/550 D LT2 L	50000 / 100000 h ¹⁾
OTi DALI 90/220...240/1A0 LT2 L	50000 / 100000 h ¹⁾
OTi DALI 90/220...240/700 D LT2 L	50000 / 100000 h ¹⁾
OTi DALI 100/220...240/750 D NFC L	100000 / 50000 h

¹⁾ Maximum T_c = 75 °C / 10% meghibásodási arány / At T_c = 65 °C / 10% failure rate

További termékadatok

Termékmegnevezés	Tokozott
OTi DALI 35/220...240/400 D LT2 L	Nem
OTi DALI 60/220...240/550 D LT2 L	Nem
OTi DALI 90/220...240/1A0 LT2 L	Nem
OTi DALI 90/220...240/700 D LT2 L	
OTi DALI 100/220...240/750 D NFC L	

Képességek

Termékmegnevezés	Programming interface	Dimmelhető	Dimmelő interfész	Dimmelési tartomány
OTi DALI 35/220...240/400 D LT2 L	DALI, LEDset	Yes	DALI-2 / Touch DIM / Touch DIM Sensor	1...100 % ¹⁾
OTi DALI 60/220...240/550 D LT2 L	DALI, LEDset	Yes	DALI-2 / Touch DIM / Touch DIM Sensor	1...100 % ¹⁾
OTi DALI 90/220...240/1A0 LT2 L	DALI, LEDset	Yes	DALI-2 / Touch DIM / Touch DIM Sensor	1...100 % ¹⁾
OTi DALI 90/220...240/700 D LT2 L	DALI, LEDset	Yes	DALI-2 / Touch DIM / Touch DIM Sensor	1...100 % ¹⁾
OTi DALI 100/220...240/750 D NFC L	DALI, NFC	Yes	DALI-2 / Touch DIM / Touch DIM Sensor	1...100 %

Termékmegnevezés	Dimmelési módszer	Túlmelegedés védelem	Túlterhelés védelem
OTi DALI 35/220...240/400 D LT2 L	Full analogue dimming	Automatic reversible	Automatic reversible
OTi DALI 60/220...240/550 D LT2 L	Full analogue dimming	Automatic reversible	Automatic reversible
OTi DALI 90/220...240/1A0 LT2 L	Full analogue dimming	Automatic reversible	Automatic reversible
OTi DALI 90/220...240/700 D LT2 L	Full analogue dimming	Automatic reversible	Automatic reversible

Termékcsalád adatlap

Termékmegnevezés	Dimmelési módszer	Túlmelegedés védelem	Túlterhelés védelem
OTi DALI 100/220...240/750 D NFC L	Full analogue dimming / AM/PWM selectable	Automatic reversible	Automatic reversible

Termékmegnevezés	Zárlatvédett	Nem terhelés -védett	Intended for no-load operation	Max. vezetékhoz sz lámpa/LED modul
OTi DALI 35/220...240/400 D LT2 L	Automatic reversible	Yes	Nem	2,0 m ²⁾
OTi DALI 60/220...240/550 D LT2 L	Automatic reversible	Yes	Nem	2,0 m ²⁾
OTi DALI 90/220...240/1A0 LT2 L	Automatic reversible	Yes	Nem	2,0 m ²⁾
OTi DALI 90/220...240/700 D LT2 L	Automatic reversible	Yes	Nem	2,0 m ²⁾
OTi DALI 100/220...240/750 D NFC L	Automatic reversible	Automatic reversible	Nem	2,0 m ²⁾

Termékmegnevezés	Alkalmasság érintésvédelmi osztályhoz	Tartalékvilágításához alkalmas	Csatlakozás típusa, bemeneti oldal	Csatlakozás típusa, kimeneti oldal
OTi DALI 35/220...240/400 D LT2 L	I	Igen	Nyomógombos kapocs	Nyomógombos kapocs
OTi DALI 60/220...240/550 D LT2 L	I	Igen	Nyomógombos kapocs	Nyomógombos kapocs
OTi DALI 90/220...240/1A0 LT2 L	I	Igen	Nyomógombos kapocs	Nyomógombos kapocs
OTi DALI 90/220...240/700 D LT2 L	I		Nyomógombos kapocs	Nyomógombos kapocs
OTi DALI 100/220...240/750 D NFC L	I		Nyomógombos kapocs	Nyomógombos kapocs

Termékmegnevezés	DALI-2 Diagnostic Data	Number of channels	DALI-2 Energy Data
OTi DALI 35/220...240/400 D LT2 L	Igen	1	Igen
OTi DALI 60/220...240/550 D LT2 L	Igen	1	Igen
OTi DALI 90/220...240/1A0 LT2 L	Igen	1	Igen
OTi DALI 90/220...240/700 D LT2 L	Igen	1	Igen
OTi DALI 100/220...240/750 D NFC L	Igen	1	Igen

1) Maximális névleges kimenet áramhoz
2) Output wires must be routed as close as possible to each other

Programming

Termékmegnevezés	Programming device	Box programming
OTi DALI 35/220...240/400 D LT2 L	DALI magic	
OTi DALI 60/220...240/550 D LT2 L	DALI magic	
OTi DALI 90/220...240/1A0 LT2 L	DALI magic	
OTi DALI 90/220...240/700 D LT2 L	DALI magic	
OTi DALI 100/220...240/750 D NFC L	DALI magic / NFC Scanner	Yes

Programmable features

Termékmegnevezés	DALI-2 Luminaire Data	TouchDIM + Sensor
OTi DALI 35/220...240/400 D LT2 L	Igen	Igen
OTi DALI 60/220...240/550 D LT2 L	Igen	Igen
OTi DALI 90/220...240/1A0 LT2 L	Igen	Igen
OTi DALI 90/220...240/700 D LT2 L	Igen	Igen
OTi DALI 100/220...240/750 D NFC L	Igen	Igen

Tanúsítványok és szabványok

Termékmegnevezés	Jóváhagyási jelek	Szabványok	Védettség típusa
OTi DALI 35/220...240/400 D LT2 L	CE / EL / VDE-ENEC / VDE-EMC / EAC / CCC / BIS / RCM	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386	IP20
OTi DALI 60/220...240/550 D LT2 L	CE / EL / VDE-ENEC / VDE-EMC / EAC / CCC / BIS / RCM	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386	IP20
OTi DALI 90/220...240/1A0 LT2 L	CE / EL / VDE-ENEC / VDE-EMC / EAC / CCC / BIS / RCM	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386	IP20
OTi DALI 90/220...240/700 D LT2 L	CE / EL / VDE-ENEC / VDE-EMC / EAC / CCC / BIS / RCM	Acc. to EN 61347-1/Acc. to EN 61347-2-13/Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61000-3-2/Acc. to EN 62384/Acc. to EN 62386	IP20
OTi DALI 100/220...240/750 D NFC L	CE / EL / VDE-ENEC / EAC / CCC / BIS / RCM	Acc. to IEC 61347-1/Acc. to IEC 61347-2-13/Acc. to IEC 62384/Acc. to IEC 62386/Acc. to IEC 61000-3-2/Acc. to IEC 61000-3-3/Acc. to IEC 61547	IP20

Logisztikai adatok

Termékmegnevezés	Commodity code
OTi DALI 35/220...240/400 D LT2 L	85044083900
OTi DALI 60/220...240/550 D LT2 L	850440829000
OTi DALI 90/220...240/1A0 LT2 L	85044083900
OTi DALI 90/220...240/700 D LT2 L	850440829000
OTi DALI 100/220...240/750 D NFC L	85044083900

Környezetvédelmi információk
Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Termékmegnevezés	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
OTi DALI 35/220...240/400 D LT2 L	14-04-2023	4052899957053 4052899494220 4062172082129	Lead
OTi DALI 60/220...240/550 D LT2 L	14-04-2023	4052899188662 4052899315884 4052899494206 4062172082167	Lead
OTi DALI 90/220...240/1A0 LT2 L	29-03-2024	4052899160071 4052899494268 4062172082327	Lead
OTi DALI 90/220...240/700 D LT2 L	21-07-2023	4052899494244 4062172082242	Lead
OTi DALI 100/220...240/750 D NFC L	12-05-2023	4062172125116	Lead

Termékmegnevezés	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
OTi DALI 35/220...240/400 D LT2 L	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	c0ca0b71-5ac6-417f-9827-9680b780d66c da689a87-0d1c-4d98-a413-b6ea5ac6a358 3562b80d-1294-4a10-813c-aadd897a8d2f
OTi DALI 60/220...240/550 D LT2 L	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	d8f69d0a-873d-4c9b-b472-095ce690d3dd abf40d9e-61fc-4cb0-bcd2-15633934146d e06d8873-1ba2-4a16-a452-97f8720ce340
OTi DALI 90/220...240/1A0 LT2 L	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	37466044-cb51-47c6-b384-ad6e70220fa7 7f1d2749-5d00-4b3a-bce3-755576cdf1f
OTi DALI 90/220...240/700 D LT2 L	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	22fd91df-871b-4ef4-83c1-f8687c2d872e f263eb8d-280f-453d-8872-873f59bdd1b2

Termékcsalád adatlap

Termékmegnevezés	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
OTi DALI 100/220...240/750 D NFC L	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	0a912ff5-0b92-4c90-b45c-5ddce9459f19

Használati tanácsok

További részletes alkalmazási információkat és grafikákat a termék adatlapján talál.

Sales and Technical Support

Sales and Technical Support www.osram.com

Download Data

File	
	User instruction OPTOTRONIC LED Power Supply
	Certificates OTi DALI OT FIT D LT2 L CB DE1 58970 040320
	Certificates OT ENEC 40038085 010322
	Certificates LED drivers EMC 40011668 300922
	Declarations of conformity EATON(CEAG)-Conformity declaration AN00948 OTi DALI 35220-240400 D LT2 L
	Declarations of conformity INOTEC-Conformity declaration AN00948 OTi DALI 35220-240400 D LT2 L
	Declarations of conformity 727247_EC OTi
	Declarations of conformity OTi DALI D LT2 L UK DoC 4281086 180221
	Declarations of conformity OTi DALI D LT2 L CE 3667898 210921
	Declarations of conformity EATON(CEAG)-Conformity declaration AM00139_OTiDALI35_220_240_400_D_LT2_L
	Declarations of conformity INOTEC- Conformity declaration AM00139_OTiDALI35_220_240_400_D_LT2_L
	CAD data OTi DALI D LT2 L IGS 270220
	CAD data OTi DALI D LT2 L STEP 270220

Termékcsalád adatlap

	CAD Data 2-dim OTI DALI D LT2 L CAD2PDF 270220
	CAD data 3-dim OTI DALI D LT2 L CAD3PDF 270220
	Certificates 539639_CD Test Approval
	Declarations of conformity EATON(CEAG)-Conformity declaration AN00950 OTI DALI 60220-240550 D LT2 L
	Declarations of conformity INOTEC-Conformity declaration AN00950 OTI DALI 60220-240550 D LT2 L
	Declarations of conformity EATON(CEAG)-Conformity declaration AM00138_OTiDALI60_220_240_550_D_LT2_L
	Declarations of conformity INOTEC- Conformity declaration AM00138_OTiDALI60_220_240_550_D_LT2_L
	CAD data 3-dim 505454_CAD data OTi DALI 60220-240550 D LT2 L
	CAD data PDF 505460_CAD data OTi DALI 60220-240550 D LT2 L
	Certificates 358995_CB Test Certificate OTi DALI 90220-2401A0 LT2 L
	Declarations of conformity EATON(CEAG)-Conformity declaration AN00952 OTI DALI 90220-2401A0 D LT2 L
	Declarations of conformity INOTEC-Conformity declaration AN00952 OTI DALI 90220-2401A0 D LT2 L
	Declarations of conformity EATON(CEAG)-Conformity declaration AM00141_OTiDALI90_220_240_1A0_D_LT2_L
	Declarations of conformity INOTEC- Conformity declaration AM00141_OTiDALI90_220_240_1A0_D_LT2_L
	CAD data 370051_CAD File OTi DALI 90220-2401A0 LT2 L
	CAD data 370053_CAD Daten OTi DALI 90220-2401A0 LT2 L
	CAD data 3-dim 370052_CAD Daten OTi DALI 90220-2401A0 LT2 L
	CAD data PDF 370054_CAD File OTi DALI 90220-2401A0 LT2 L
	User instruction OPTOTRONIC LED Power Supply
	Declarations of conformity EATON(CEAG)-Conformity declaration AN00951 OTI DALI 90220-240700 D LT2 L
	Declarations of conformity INOTEC-Conformity declaration AN00951 OTI DALI 90220-240700 D LT2 L
	Declarations of conformity EATON(CEAG)-Conformity declaration AM00140_OTiDALI90_220_240_700_D_LT2_L
	Declarations of conformity INOTEC- Conformity declaration AM00140_OTiDALI90_220_240_700_D_LT2_L

Termékcsalád adatlap

	User instruction OPTOTRONIC LED Power Supply
	Certificates OTi DALI 100 D NFC L EATON 091220
	Declarations of conformity OTi DALI D NFC L CE 4162887 101023

Ecodesign regulation information:

Intended for use with LED modules.
The forward voltage of the LED light source shall be within the defined operating window of the control gear in all operating conditions including dimming if applicable.

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logisztikai adatok

Termékkód	Termékmegnevezés	Csomagolás (darab/egység)	Méreték (hosszúság x szélesség x magasság)	Térfogat	Bruttó súly
4052899494220	OTi DALI 35/220...240/400 D LT2 L	Karton 20	305 mm x 161 mm x 104 mm	5.11 dm ³	4277.00 g
4052899494206	OTi DALI 60/220...240/550 D LT2 L	Karton 20	305 mm x 161 mm x 104 mm	5.11 dm ³	4277.00 g
4052899494268	OTi DALI 90/220...240/1A0 LT2 L	Karton 20	305 mm x 161 mm x 104 mm	5.11 dm ³	4277.00 g
4052899494244	OTi DALI 90/220...240/700 D LT2 L	Karton 20	305 mm x 161 mm x 104 mm	5.11 dm ³	4277.00 g
4062172125116	OTi DALI 100/220...240/750 D NFC L	Karton 20	303 mm x 159 mm x 105 mm	5.06 dm ³	4187.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Adatvédelem

Termékcsalád adatlap

This OSRAM driver can be configured using the Tuner4TRONIC software. This requires registering on www.mynosram.com and downloading the Tuner4TRONIC software from the Internet. The Tuner4TRONIC software enables users to access and view the operational data of a luminaire or driver via the corresponding programming interfaces. A password key (Config Lock) must be set up in the driver via the Tuner4TRONIC software in order to control which users can access and view operational data. Follow the instructions for password setup. To grant an external person or company rights to access or view operational data, you can assign password keys. In this case, however, you are responsible for ensuring that the third party concerned takes notice of the information described here. However, OSRAM can read out operating data from devices for maintenance and service purposes even when a password key has been assigned. In individual cases, OSRAM will also use its access rights in order to optimize or improve driver hardware and driver functions. In accordance with data privacy principles, any user of operating data (luminaire manufacturers, third parties with access rights) must ensure that personal data (e.g. name, address, location IDs) are only merged with the prior written consent of the person (end user) concerned. The respective user of the operating data is responsible for providing evidence of consent.

Lemondás

A változtatás jogát fenntartjuk. Hibák és mulasztások kizárva. Mindig győződjön meg arról, hogy a legújabb kiadást használja.