

LR-P-1500 -RGBW840-10S-BK-15-TB-G12L

LINEARlight Rigid FINESSE |



A termék jellemzői

- Slim, modular LED fixture for linear applications, fully customizable
- Several optics, Wall Grazing and WallWashing; 10°, 30°, 60°
- Outdoor IP67 or Indoor IP43 versions available
- Large operating temperature range: from -30 ° to +50 ° Celsius
- Luminous flux: > 2000 lm/m; 1200 m/m; 900 lm/m
- Color uniformity ≤ 2 SDCM
- Lifetime up to 60.000 h L80B10; LM80 and LM79
- Large selection of color temperatures: 2400 K – 5000 K; CRI 80, CRI 90
- Dimmable by OPTOTRONIC LED driver from 0 % to 100 %
- Designed in Italy, made in Germany
- Durable, coated aluminum profile resistant to harsh environments: AMA

A termék előnyei

- 15 lengths available to adapt to all conditions
- Easy to configure the desired light performance for optimal illumination
- Protected against the atmospheric agents: from the desert to the glacier
- Long-time functionality and maintenance-free
- High color fidelity to beautify every design
- Fully controllable by most used light control protocols: DALI, DMX
- Color consistent with LINEARlight FLEX products
- Several installation accessories available



Termék adatlap

Alkalmazási területek

- Wall Grazing
- Ambient lighting
- Wall washing
- Cove lighting
- Architectural integration

Termék adatlap

Műszaki adatok

Termékinformáció

Rendelési hivatkozás	LR-P-1500-RGBW8
----------------------	-----------------

Elektromos adatok

Accidental reverse input voltage protection up to	25 V
---	------


Fotometriai adatok

Színhőmérséklet	4000 K
Fényáram	2500 lm
Fényszín (megnevezés)	RGBW
Színvisszaadási index	80
Lámpatest hatásfok	0,56
Color temperature	4000 K

Fénytechnikai adatok

Beam angle	10 °
------------	------

Méreték és súly

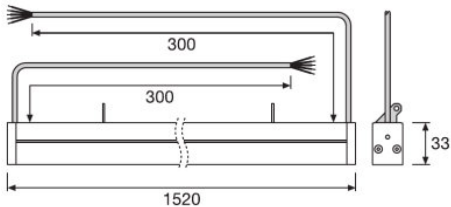

Hosszúság	00 mm
Magasság	330 mm
Termék súlya	150000 g
PCHL Product weight [AGMP]	0

Szín és anyag

Test anyaga	Aluminum
Termék színe	Grey
Fedél anyaga	Polycarbonate (PC)

Termék adatlap

Hőmérséklet és működési feltételek

Környezeti hőmérséklet tartomány	-20...+50 °C
----------------------------------	--------------

Élettartam

Élettartam	60000 h
------------	---------

Képességek

Állítható	Nem
Dimmelhető	Yes
Színszabályozás (RGB)	Igen
LIGHTIFY technológia	No

Tanúsítványok és szabványok

Védettség típusa	IP67
------------------	------

Ország-specifikus kategorizálás

Rendelési hivatkozás	LR-P-1500-RGBW8
----------------------	-----------------

Logisztikai adatok

Commodity code	94051190900
----------------	-------------

Környezetvédelmi információk

Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	28-06-2022
Primary Article Identifier	4062172226974
Declaration No. in SCIP database	In work

Download Data

File	
	User instruction FINESSE
	User instruction FINESSE RGB RGBW
	Product Datasheet LINEARlight RIGID FINESSE (EN)
	Product Datasheet LINEARlight RIGID FINESSE RGB (W) (EN)

Termék adatlap

	Brochures Light is awesome - LINEARlight Rigid FINESSE (EN)
	Certificates Finesse LR P fixed CB 04032022
	Certificates Finesse LR P fixed D 04032022
	Certificates Finesse LR P fixed ENEC
	Certificates Finesse LR P floodligh CB 04032022
	Certificates Finesse LR P floodligh D 04032022
	Certificates Finesse LR P floodligh ENEC 04032022
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-10B-XX-10-G1 White LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-10S-XX-10-G1 White LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-120D-XX-10-G1 White LTD
	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-30S-XX-10-G1 White LTD

Termék adatlap

	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 Blue LTD
	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 Green LTD
	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 Red LTD
	Eulumdat LR-P-1500-RGBW930-WW-XX-10-G1 White LTD
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-10B-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-10S-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-120D-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 Red IES
	IES data LR-P-1500-RGBW930-30S-XX-10-G1 White IES
	IES data LR-P-1500-RGBW930-WW-XX-10-G1 Blue IES
	IES data LR-P-1500-RGBW930-WW-XX-10-G1 Green IES
	IES data LR-P-1500-RGBW930-WW-XX-10-G1 Red IES

	IES data LR-P-1500-RGBW930-WW-XX-10-G1 White IES
---	---

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logisztikai adatok

Termékkód	Termékmegnevezés	Csomagolás (darab/egység)	Méretek (hosszúság x szélesség x magasság)	Térfogat	Bruttó súly
4062172226974	LR-P-1500 -RGBW840-10S-BK-15-TB-G12L	Karton 6	1638 mm x 121 mm x 111 mm	22.00 dm ³	10043.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Lemondás

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.