


TEC FLEX Colormix Protect

LED modules flexible, strips, colored

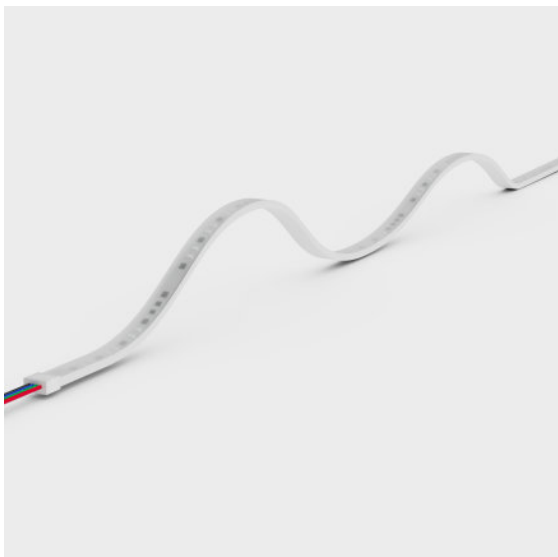

A termék jellemzői

- Flexible and cuttable LED strip
- Up to 50,000 hrs lifetime @ tc max

A termék előnyei

- Uniform color changing
- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back

Alkalmazási területek

- Effect lighting in architecture



Termékcsalád adatlap

Műszaki adatok

Elektromos adatok

Termékmegnevezés	Névleges feszültség	Áram típusa	Névleges feszültség	Bemeneti feszültségtartomány	Accidental reverse input voltage protection up to
TFP400RGB -G1-05	240 V	DC	4850 W	23...25 V	25 V


Fotometriai adatok

Termékmegnevezés	Fényszín LED	Luminous efficacy	Fényszín (megnevezés)
TFP400RGB -G1-05	RGB	32 lm/W	Red/Green/Blue

Méreték és súly

Termékmegnevezés	Hosszúság	Termék súlya
TFP400RGB -G1-05	50000 mm	29000 g

Produkt Strichzeichnungen (vermasst)

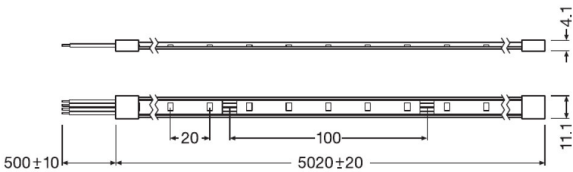

TFP400RGB -G1-05

Termékcsalád adatlap

Hőmérséklet és működési feltételek

Termékmegnevezés	Hőmérséklet-tartomány működéskor	Hőmérséklet-tartomány tároláskor
TFP400RGB -G1-05	-25...80 °C	-30...85 °C

További termékadatok

Termékmegnevezés	ID of contained light source [AGGR]
TFP400RGB -G1-05	LS_SHZ_600469

Tanúsítványok és szabványok

Termékmegnevezés	Energy efficiency class of the contained light source
TFP400RGB -G1-05	G

Logisztikai adatok

Termékmegnevezés	Commodity code
TFP400RGB -G1-05	85395100000

Környezetvédelmi információk
Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Termékmegnevezés	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
TFP400RGB -G1-05	07-07-2023	4062172155069	Lead
Termékmegnevezés	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
TFP400RGB -G1-05	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	fb575afa-94ad-4392-92cf-e9ebdfa33caa

Használati tanácsok

További részletes alkalmazási információkat és grafikákat a termék adatlapján talál.

Sales and Technical Support

Sales and Technical Support www.osram.com

Termékcsalád adatlap

Download Data

File	
	User instruction TEC Flex Protect Tunable White, TEC Flex Protect RGB
	Product Datasheet TEC Flex RGB IP66 Product Datasheet, EN
	Brochures Light is strong - Discover the versatile and flexible lighting system OSRAM 24V TEC Flex (EN)
	Certificates TEC Flex RGB CE 4239858 210820
	Certificates TF(P)RGB ENEC 35-115144 140920
	Eulumdat Eulumdat TFP400RGB-LDT
	IES data Eulumdat TFP400RGB-IES

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015. The contained light source is intended for use in applications requiring high-quality coloured light.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logisztikai adatok

Termékkód	Termékmegnevezés	Csomagolás (darab/egység)	Méretek (hosszúság x szélesség x magasság)	Térfogat	Bruttó súly
-----------	------------------	---------------------------	--	----------	-------------

Termékcsalád adatlap

Logisztikai adatok

4062172155069	TFP400RGB -G1-05	Karton 10	280 mm x 305 mm x 180 mm	15.37 dm ³	3874.00 g
---------------	------------------	--------------	--------------------------	-----------------------	-----------

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Opcionális tartozékok

Termékmegnevezés	Tartozékok neve	Tartozékok kódja
TFP400RGB -G1-05	ENDCAP -IP67 KIT 10PCS	▶ 4062172176552
TFP400RGB -G1-05	CONN-FLEX -4P-050 KIT 10PCS	▶ 4062172179744
TFP400RGB -G1-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TFP400RGB -G1-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TFP400RGB -G1-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TFP400RGB -G1-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TFP400RGB -G1-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TFP400RGB -G1-05	FX -SC08-G2--BTJ-IP54	▶ 4052899568853

Lemondás

A változtatás jogát fenntartjuk. Hibák és mulasztások kizárva. Mindig győződjön meg arról, hogy a legújabb kiadást használja.