


TEC FLEX Tunable White Protect

LED modules for semi-professional applications

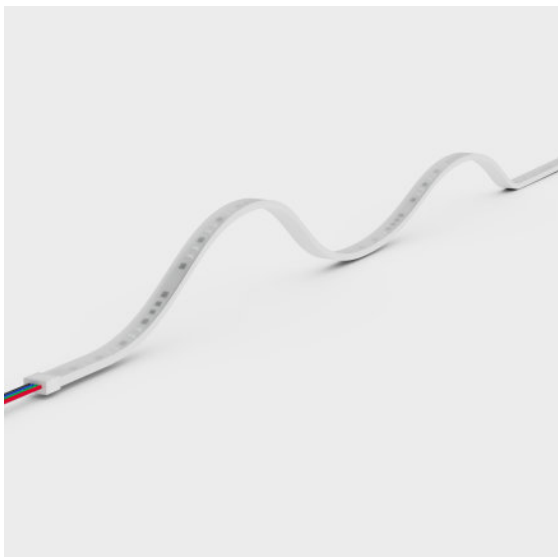

A termék jellemzői

- Flexible and cuttable LED strip
- Color consistency in 3 SDCM
- Up to 50,000 hrs lifetime @ tc max

A termék előnyei

- Easy mounting on many smooth surfaces thanks to self-adhesive tape at the back

Alkalmazási területek

- Dynamic mood lighting



Termékcsalád adatlap

Műszaki adatok

Elektromos adatok

Termékmegnevezés	Névleges feszültség	Áram típusa	Névleges feszültség	Bemeneti feszültségtartomány	Accidental reverse input voltage protection up to
TFP2000TW -G1-827.865-05	240 V	DC	5400 W	23...25 V	25 V


Fotometriai adatok

Termékmegnevezés	Fényszín LED	Színvisszaadási index	Luminous efficacy	Fényszín (megnevezés)
TFP2000TW -G1-827.865-05	Dynamic White	80	1348 lm/W	Dynamic White

Méretetek és súly

Termékmegnevezés	Hosszúság	Termék súlya
TFP2000TW -G1-827.865-05	50000 mm	30500 g

Produkt Strichzeichnungen (vermasst)

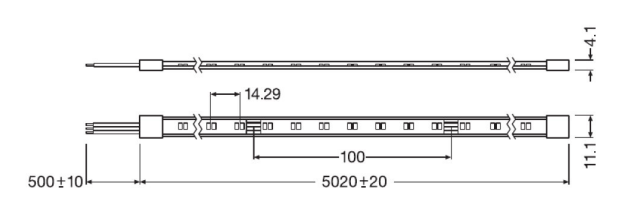

TFP2000TW -G1-827.865-05

Hőmérséklet és működési feltételek

Termékmegnevezés	Hőmérséklet-tartomány működéskor	Hőmérséklet-tartomány tároláskor
TFP2000TW -G1-827.865-05	-25...80 °C	-30...85 °C

További termékadatok

Termékmegnevezés	ID of contained light source [AGGR]
TFP2000TW -G1-827.865-05	LS_SHZ_600421

Tanúsítványok és szabványok

Termékmegnevezés	Energy efficiency class of the contained light source
TFP2000TW -G1-827.865-05	E

Termékcsalád adatlap

Logisztikai adatok

Termékmegnevezés	Commodity code
TFP2000TW -G1-827.865-05	85395100000

Környezetvédelmi információk
Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

Termékmegnevezés	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
TFP2000TW -G1-827.865-05	07-07-2023	4062172154260	Lead
Termékmegnevezés	CAS No. of substance 1	Safe Use Instruction	Declaration No. in SCIP database
TFP2000TW -G1-827.865-05	7439-92-1	The identification of the Candidate List substance is sufficient to allow safe use of the article.	1d23825e-b60c-4620-8cdd-ed4bd7558210

Használati tanácsok

További részletes alkalmazási információkat és grafikákat a termék adatlapján talál.

Sales and Technical Support

Sales and Technical Support www.osram.com

Download Data

File	
	User instruction TEC Flex Protect Tunable White, TEC Flex Protect RGB
	Product Datasheet TEC Flex Tunable White IP66 product datasheet (EN)
	Brochures Light is strong - Discover the versatile and flexible lighting system OSRAM 24V TEC Flex (EN)
	Certificates TEC Flex TW CE 4228593 210820
	Certificates TF(P)2000TW ENEC 071020
	Eulumdat Eulumdat TFP2000TW-LDT
	IES data Eulumdat TFP2000TW-IES

Termékcsalád adatlap

Ecodesign regulation information:

- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717.
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer. In the contrary, and limited to the LINEARlight Flex Diffuse, LINEARlight Rigid Finesse, GINO LED Flex Diffuse and LUMINENT Milky product families, the contained light source is an integrated part of the containing product and its removal can only be done by causing a permanent damage to the containing product due to its tight mechanical, electrical, optical, thermal interaction and/or environmental protection with or from the containing product. Therefore, a replacement of the light source with the use of common available tools is not justified.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logisztikai adatok

Termékkód	Termékmegnevezés	Csomagolás (darab/egység)	Méretek (hosszúság x szélesség x magasság)	Térfogat	Bruttó súly
4062172154260	TFP2000TW -G1-827.865-05	Karton 10	280 mm x 305 mm x 180 mm	15.37 dm ³	4024.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Opcionális tartozékok

Termékmegnevezés	Tartozékok neve	Tartozékok kódja
TFP2000TW -G1-827.865-05	ENDCAP -IP67 KIT 10PCS	▶ 4062172176552
TFP2000TW -G1-827.865-05	CORNER-FLEX -4P-015 KIT 10PCS	▶ 4062172179676
TFP2000TW -G1-827.865-05	LTS-SLIMTRACK -2000 KIT 5 PCS	▶ 4062172207300
TFP2000TW -G1-827.865-05	FX-QMS-G1 -TU15H6W3-300	▶ 4052899448889
TFP2000TW -G1-827.865-05	FX-QMS-G1 -TU16H12W3-300	▶ 4052899448988
TFP2000TW -G1-827.865-05	FX-QMS-G1 -TU16H12-300	▶ 4052899448964
TFP2000TW -G1-827.865-05	FX -SC08-G2-CT4PJ	▶ 4052899464858
TFP2000TW -G1-827.865-05	FX -SC08-G2--BTJ-IP54	▶ 4052899568853

Termékcsalád adatlap

Lemondás

A változtatás jogát fenntartjuk. Hibák és mulasztások kizárva. Mindig győződjön meg arról, hogy a legújabb kiadást használja.