

Termék adatlap

HQI-T 150 W/NDL UVS

POWERSTAR HQI-T G12 | Fémhalogén lámpák kvarc technológiával



Termék adatlap

Műszaki adatok


Elektromos adatok

ZLDV_PFC capacitor at 50 Hz [AGGR]	20 µF
ZLDV_Ignition voltage [AGGR]	3.6/5.0 kVp
ZLDV_Nominal current [AGGR]	1.8 A A

Fotometriai adatok

ZLDV_Rated LLMF at 2,000 h [AGGR]	0.82
ZLDV_Rated LLMF at 4,000 h [AGGR]	0.77
ZLDV_Rated LLMF at 6,000 h [AGGR]	0.73
ZLDV_Rated LLMF at 8,000 h [AGGR]	0.68
ZLDV_UV protection [AGGR]	Yes
ZLDV_Luminous flux [AGGR]	13000 lm

Méreték és súly



ZLDV_Light center length (LCL) [AGGR]	56,0 mm
ZLDV_Product weight [AGGR]	30.00 g
ZLDV_Overall length [AGGR]	84.00 mm

Élettartam

ZLDV_Lifespan B50 [AGGR]	9000 h
--------------------------	--------

További termékadatok

ZLDV_Design / version [AGGR]	Clear
ZLDV_Mercury content [AGGR]	30.0 mg
Ártalmatlanítás WEEE szerint	Yes

Képességek

Termék adatlap

ZLDV_Burning position [AGGR]	Any
ZLDV_Enclosed luminaire required [AGGR]	Yes

Tanúsítványok és szabványok

ZLDV_Energy efficiency class [AGGR]	G
ZLDV_Energy consumption [AGGR]	152.00 kWh/1000h


Ország-specifikus kategorizálás

ZLDV_ILCOS [AGGR]	MT/UB-150/842-H/E/SL-G12-25/84
-------------------	--------------------------------

Környezetvédelmi információk

Information according Art. 33 of EU Regulation (EC) 1907/2006 (RECh)	
Date of Declaration	09-12-2022
Primary Article Identifier	4008321974365
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	No declarable substances contained

Light Distribution

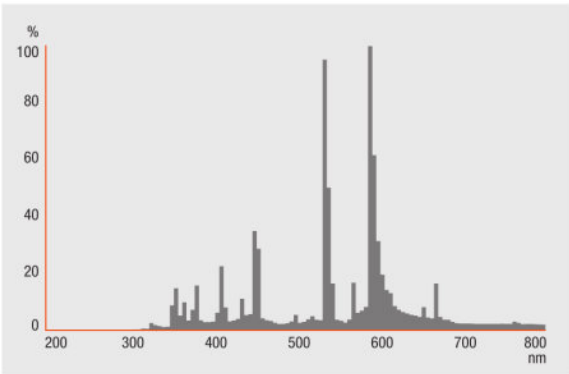


HQI_T_NDL_G12


Termék adatlap

System guarantee


For the vast majority of our lamps we are offering an extended system guarantee in conjunction with OSRAM POWERTRONIC control gear.

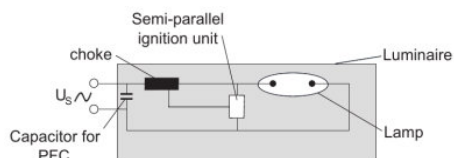


OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH SEMI-PARALLEL IGNITION UNIT

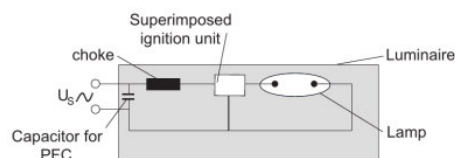

OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH A SUPERIMPOSED IGNITION UNIT

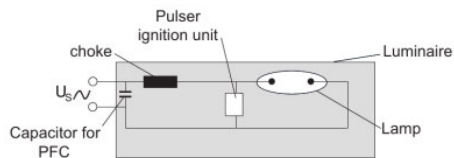

OPERATION OF HIGH INTENSITY DISCHARGE LAMPS WITH PULSE IGNITION UNIT

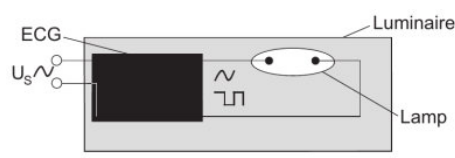

ELEKTRONIC OPERATION OF HIGH INTENSITY DISCHARGE LAMPS

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logisztikai adatok

Termék adatlap

Termékkód	Termékmegnevezés	Csomagolás (darab/egység)	Méretek (hosszúság x szélesség x magasság)	Térfogat	Bruttó súly
4008321974365	HQI-T 150 W/NDL UVS	Karton 12 Pieces Folding Box	180 mm x 140 mm x 127 mm	3.20 dm ³	567.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For more information on the system guarantee and the terms and conditions of the guarantee visit <https://www.inventronics-light.com/multilevel-guarantees>

Lemondás

A változtatás jogát fenntartjuk. Hibák és mulasztások kizárva. Mindig győződjön meg arról, hogy a legújabb kiadást használja.

OSRAM is distribution partner
of LEDVANCE of LAMPS

OSRAM

OSRAM GmbH
Marcel-Breuer-Strasse 6
80807 Munich, Germany

HQI-T 150 W/NDL UVS

POWERSTAR HQI-T G12 | Fémhalogén lámpák kvarc technológiával

Product name	Product name ECG	EAN
HQI-T 150 W/NDL UVS	PTi 150/220-240 I	4008321915535
	PTi 150/220-240 S	4008321188090
	PTo 150/220-240 3DIM	4008321956385